WAAS	APP CRS		
CH **77804**	**273°**	Rwy Idg	**7782**
W27A		TDZE	**654**
		Apt Elev	**680**

RNAV (GPS) Z RWY 27L

CHICAGO O'HARE INTL (ORD)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALSF-2, increase LNAV Cat C/D visibility to 1⅜ mile.

ALSF-2

MISSED APPROACH: Climb to 4000 direct WASCO and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWERS	GND CON	(TWR CENTER)
135.4	**119.0 292.125**	**128.15 348.0** (Rwy 9L/27R) **133.0 348.0** (10R/28L)	**124.125** (TWR NORTH)	**121.75** (OBND)
282.225		**120.75 121.15 126.9 132.7 348.0** (CENTER)	**118.05** (TWR SOUTH)	**121.9** (IBND)
			226.675 (ALL TWRS)	

CLNC DEL **121.6** | CPDLC

RADAR REQUIRED

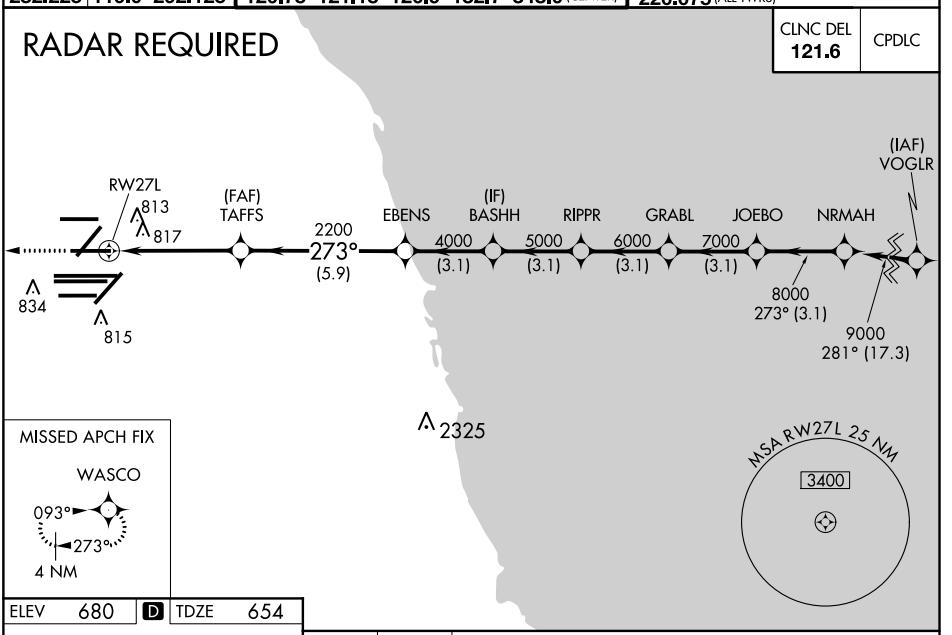

ELEV 680 | D | TDZE 654

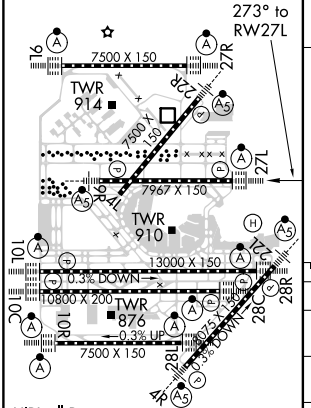

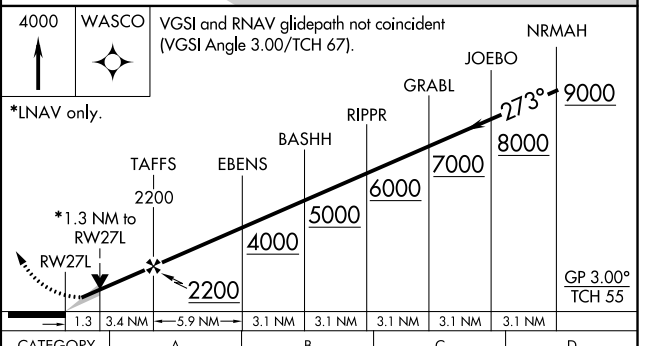

CATEGORY	A	B	C	D
LPV DA	854/18 200 (200-½)			
LNAV/VNAV DA	1125/60 471 (500-1¼)			
LNAV MDA	1120/24 466 (500-½)		1120/50 466 (500-1)	

EC-3, 16 JUL 2020 to 13 AUG 2020
EC-3, 16 JUL 2020 to 13 AUG 2020