

# DANLS THREE DEPARTURE (RNAV)



SE-1, 16 JUL 2020 to 13 AUG 2020

D-ATIS 135.1  
CINCDEL 126.05  
CPDLC  
GND CON  
121.9 348.6  
NASHVILLE TOWER  
118.6 257.8  
NASHVILLE DEP CON  
119.35 372.0

**TOP ALTITUDE:**  
4000

### TAKEOFF MINIMUMS:

Rwys 2C, 2L, 2R, 13, 20L, 31: Standard with minimum climb of 500' per NM to 1100.  
Rwys 20C, 20R: Standard with minimum climb of 500' per NM to 1300.

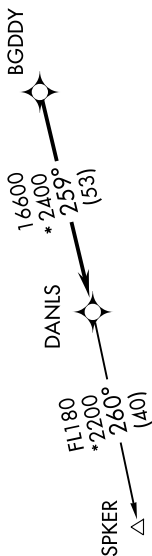

- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.
- NOTE: Radar required.
- NOTE: For Turbojet aircraft only.
- NOTE: Transponder code will be issued via PDC or Nashville clearance delivery.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.

### DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RWYS 2L/C/R: Climb heading 021° or assigned ATC heading, thence....
- TAKEOFF RWY 13: Climb heading 136° or assigned ATC heading, thence....
- TAKEOFF RWYS 20L/C/R: Climb heading 201° or assigned ATC heading, thence....
- TAKEOFF RWY 31: Climb heading 316° or assigned ATC heading, thence....

....expect radar vectors to BGDDY, then on track 259° to DANLS. Maintain 4000. Expect clearance to filed altitude within five (5) minutes after departure.

SPKER TRANSITION (DANLS3.SPKER)

NOTE: Chart not to scale.

SE-1, 16 JUL 2020 to 13 AUG 2020