


# EVWAN THREE DEPARTURE (RNAV)

**TOP ALTITUDE:**  
4000

**TAKEOFF MINIMUMS:**

Rwys 2C, 2L, 2R, 13, 20C, 20L, 20R, 31: Standard  
with minimum climb of 500' per NM to 1100.


- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.
- NOTE: Radar required.
- NOTE: For Turbojet aircraft only.
- NOTE: Transponder code will be issued via PDC or Nashville clearance delivery.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.



NOTE: Chart not to scale.

SE-1, 16 JUL 2020 to 13 AUG 2020

- D-ATIS 135.1
- CLNC DEL 126.05
- CPDLC
- GND CON
- 121.9 348.6
- NASHVILLE TOWER
- 118.6 257.8
- NASHVILLE DEP CON
- 118.4 360.7

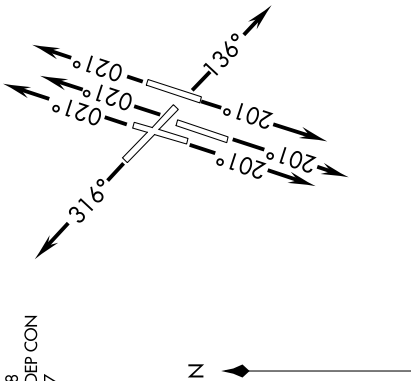

**DEPARTURE ROUTE DESCRIPTION**

- TAKEOFF RWYS 2L/C/R: Climb heading 021° or assigned ATC heading, thence....
- TAKEOFF RWY 13: Climb heading 136° or assigned ATC heading, thence....
- TAKEOFF RWYS 20L/C/R: Climb heading 201° or assigned ATC heading, thence....
- TAKEOFF RWY 31: Climb heading 316° or assigned ATC heading, thence....

....expect radar vectors to CHPPY, then on track 115° to EVWAN. Maintain 4000, expect clearance to filed altitude within five (5) minutes after departure.

SE-1, 16 JUL 2020 to 13 AUG 2020

# EVWAN THREE DEPARTURE (RNAV)