


# GDOGG THREE DEPARTURE (RNAV)

D-ATIS 135.1  
CLNC DEL 126.05  
CPDLC  
GND CON  
121.9 348.6  
NASHVILLE TOWER  
118.6 257.8  
NASHVILLE DEP CON  
119.35 372.0

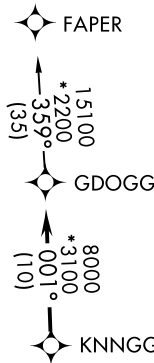


**TOP ALTITUDE:  
4000**

**TAKEOFF MINIMUMS:**

Rwys 2C, 2L, 2R, 13, 20L, 31: Standard with minimum climb of 500' per NM to 1100.  
Rwys 20C, 20R: Standard with minimum climb of 500' per NM to 1300.

- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.
- NOTE: Radar required.
- NOTE: For Turbojet aircraft only.
- NOTE: Transponder code will be issued via PDC or Nashville clearance delivery.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.

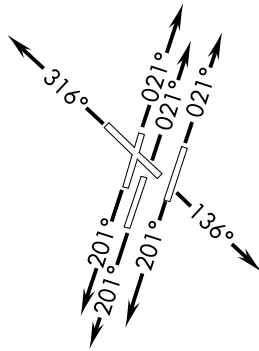

NOTE: Chart not to scale.

SE-1, 16 JUL 2020 to 13 AUG 2020

SE-1, 16 JUL 2020 to 13 AUG 2020

**DEPARTURE ROUTE DESCRIPTION**

- TAKEOFF RWYS 2L/C/R: Climb heading 021° or assigned ATC heading, thence....
- TAKEOFF RWY 13: Climb heading 136° or assigned ATC heading, thence....
- TAKEOFF RWYS 20L/C/R: Climb heading 201° or assigned ATC heading, thence....
- TAKEOFF RWY 31: Climb heading 316° or assigned ATC heading, thence....

...expect radar vectors to KNNGG, then on track 001° to GDOGG. Maintain 4000. Expect clearance to filed altitude within five (5) minutes after departure.

FAPER TRANSITION (GDOGG3.FAPER)

# GDOGG THREE DEPARTURE (RNAV)