WAAS CH 65615 W03A	APP CRS 028°	Rwy Idg 5211 TDZE 3294 Apt Elev 3298

RNAV (GPS) RWY 3
CHADRON MUNI (CDR)

Baro-VNAV NA when using Pine Ridge altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 23°C (73°F). For inop MALSR, when using Pine Ridge altimeter setting, increase LPV all Cats visibility to ⅞. DME/DME RNP -0.3 NA. VDP NA with Pine Ridge altimeter setting. When local altimeter setting not received, use Pine Ridge altimeter setting and increase all DA 70 feet and all MDA 80 feet; increase LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C and D visibility ⅜ mile, and increase Circling Cats C and D visibility ¼ mile.

-32°C

MALSR

MISSED APPROACH: Climb to 5100 direct EDUQA and hold.

ASOS	DENVER CENTER	UNICOM
118.05	127.95 338.2	122.8 (CTAF) L

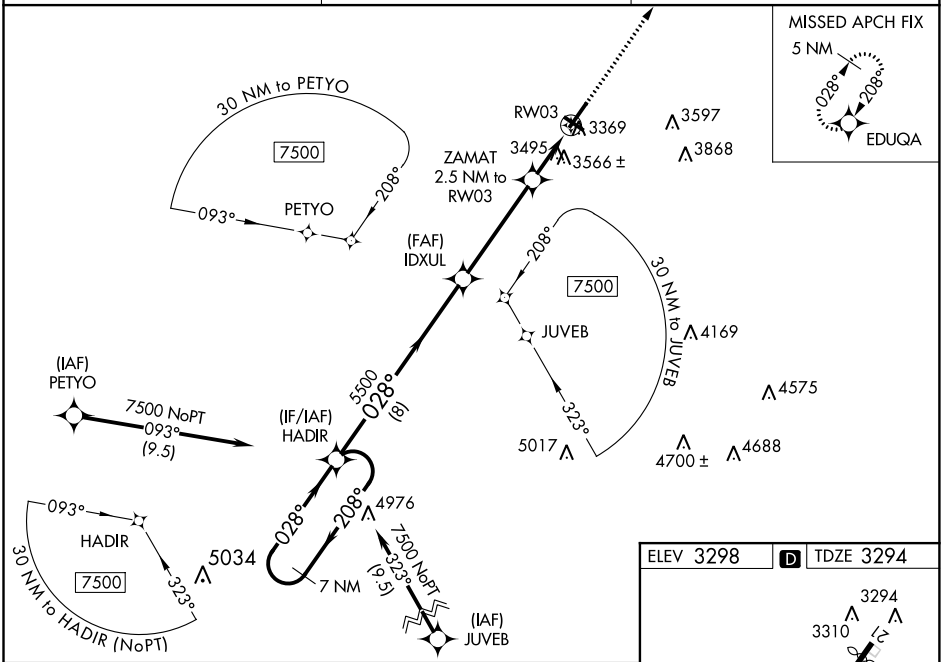

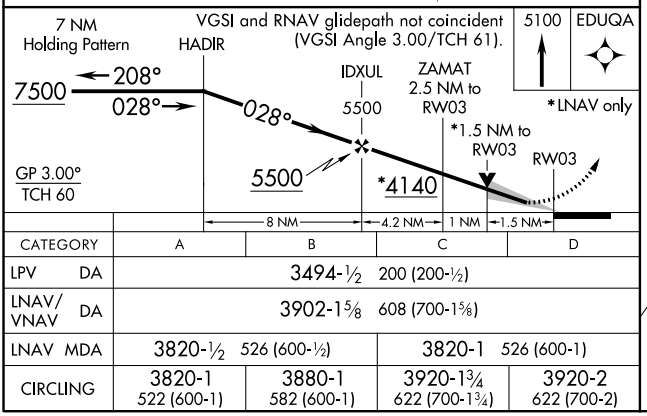

CATEGORY	A	B	C	D
LPV DA	3494-½	200 (200-½)		
LNAV/VNAV DA	3902-1⅝	608 (700-1⅝)		
LNAV MDA	3820-½	526 (600-½)	3820-1	526 (600-1)
CIRCLING	3820-1 522 (600-1)	3880-1 582 (600-1)	3920-1¾ 622 (700-1¾)	3920-2 622 (700-2)

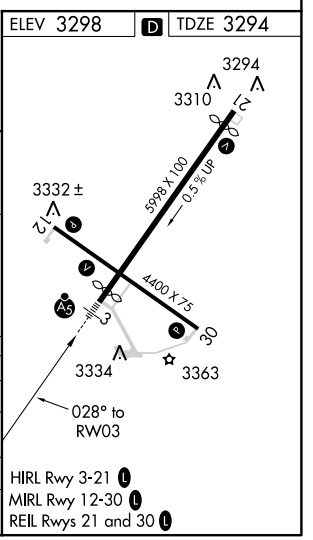

HIRL Rwy 3-21 L
MIRL Rwy 12-30 L
REIL Rwys 21 and 30 L

NC-2, 16 JUL 2020 to 13 AUG 2020
NC-2, 16 JUL 2020 to 13 AUG 2020