

WAAS CH <b>69523</b> <b>W30A</b>	APP CRS <b>298°</b>	Rwy Idg <b>4400</b> TDZE <b>3290</b> Apt Elev <b>3298</b>
--	------------------------	--


# RNAV (GPS) RWY 30

CHADRON MUNI (CDR)


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pine Ridge altimeter setting and increase all DA 70 feet and all MDA 80 feet; increase LPV all Cats visibility 1/8 mile, LNAV/VNAV all Cats visibility 1/4 mile, and LNAV and Circling Cat C visibility 1/4 mile. Baro-VNAV and VDP NA with Pine Ridge altimeter setting.

▲ MISSED APPROACH: Climb to 6300 direct CABAX and hold.

ASOS <b>118.05</b>	DENVER CENTER <b>127.95 338.2</b>	UNICOM <b>122.8 (CTAF)</b>
-----------------------	--------------------------------------	-------------------------------

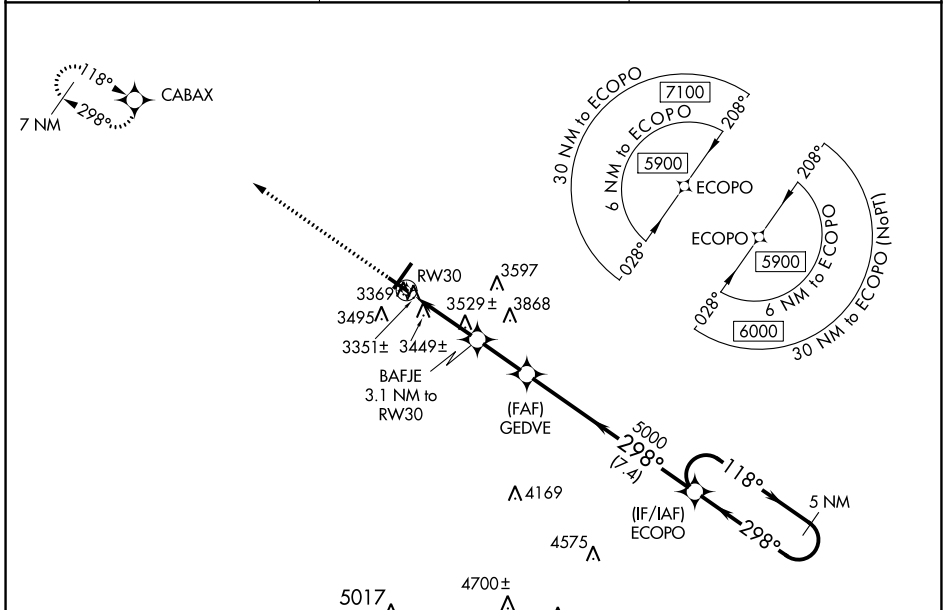

ELEV 3298	D	TDZE 3290
-----------	---	-----------

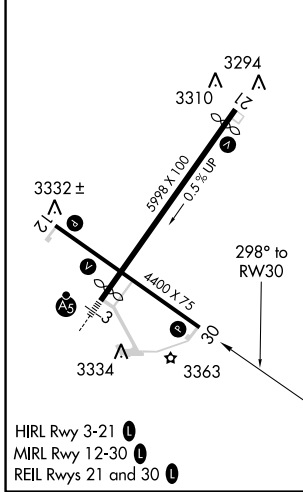

6300	CABAX	5 NM Holding Pattern		
*LNAV only	BAFJE 3.1 NM to RW30	GEDVE 5000		
	*1.4 NM to RW30	ECOPO 5900		
		GP 3.00° TCH 40		
	1.4 NM	1.7 NM		
	2.2 NM	7.4 NM		
CATEGORY	A	B	C	D
LPV DA	3540-1	250 (300-1)		NA
LNAV/VNAV DA	3767-1 5/8	477 (500-1 5/8)		NA
LNAV MDA	3780-1	490 (500-1)	3780-1 3/8 490 (500-1 3/8)	NA
CIRCLING	3820-1	522 (600-1)	3920-1 3/4 622 (700-1 3/4)	NA

NC-2, 16 JUL 2020 to 13 AUG 2020

NC-2, 16 JUL 2020 to 13 AUG 2020