

| | | |
|---|------------------------|---|
| LOC/DME I-LCH 109.1 Chan 28 | APP CRS 152° | Rwy Idg 6500 TDZE 12 Apt Elev 15 |
|---|------------------------|---|

ILS or LOC RWY 15




LAKE CHARLES RGNL (LCH)

ASR For inop ALS, increase S-LOC 15 Cats C and D visibility to 1 3/8 mile.
** RVR 1800 authorized with use of FD or AP or HUD to DA.



MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct LCH VORTAC and hold.

| | | | | | |
|-----------------------|--|---|-------------------------|---------------------------|-------------------------|
| ATIS 118.75 | LAKE CHARLES APP CON * 119.35 353.75 | LAKE CHARLES TOWER * 120.7 (CTAF) 257.8 | GND CON 121.8 | CLNC DEL 126.25 | UNICOM 122.95 |
|-----------------------|--|---|-------------------------|---------------------------|-------------------------|

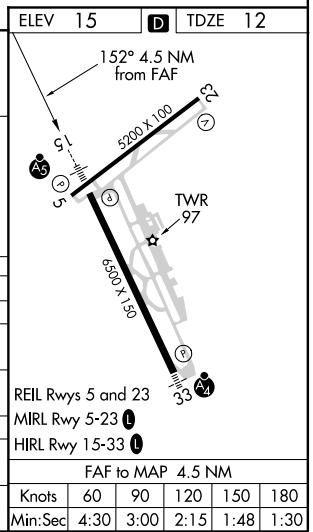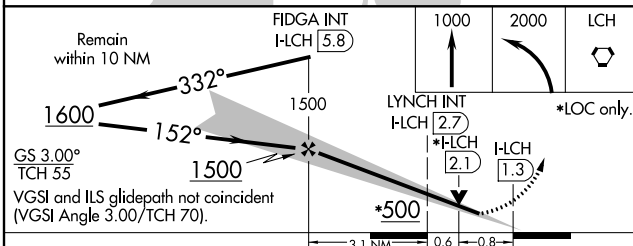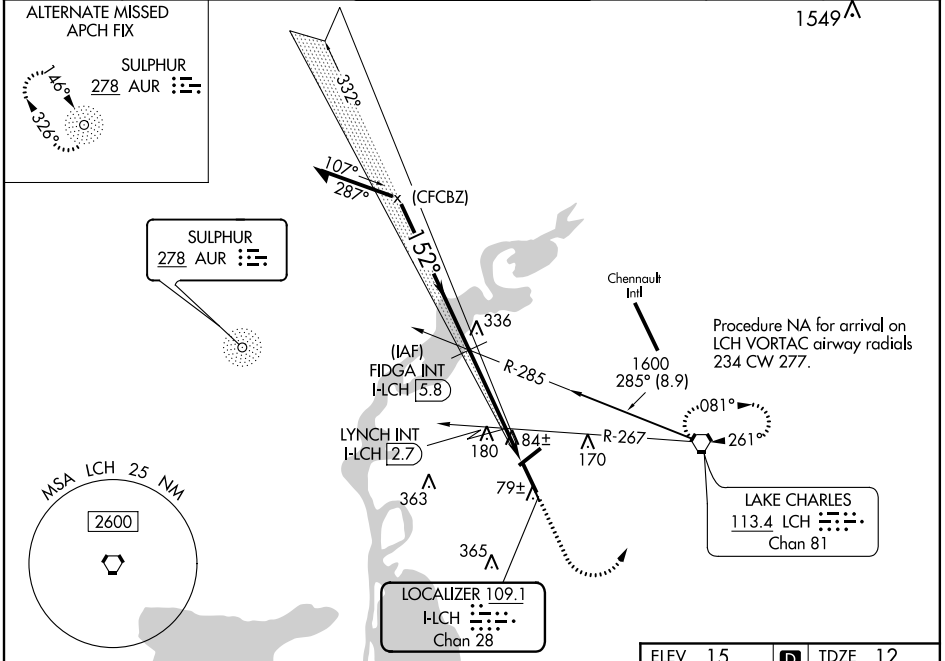

| CATEGORY | A | B | C | D |
|---|----------------------|----------------------|------------------------------|----------------------|
| S-ILS 15 ** | 212/24 200 (200-1/2) | | | |
| S-LOC 15 | 500/24 | 488 (500-1/2) | 500/50 | 488 (500-1) |
| C CIRCLING | 500-1 | 485 (500-1) | 580-1 1/2 565 (600-1 1/2) | 680-2 665 (700-2) |
| LYNCH FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED) | | | | |
| S-LOC 15 | 340/24 | 328 (400-1/2) | 340/26 | 328 (400-1/2) |
| C CIRCLING | 440-1 425 (500-1) | 480-1 465 (500-1) | 580-1 1/2 565 (600-1 1/2) | 680-2 665 (700-2) |

SC-4, 16 JUL 2020 to 13 AUG 2020

SC-4, 16 JUL 2020 to 13 AUG 2020