

WAAS CH 63199 W17A	APP CRS 174°	Rwy Idg TDZE Apt Elev	7351 843 845
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17R

GRAND FORKS INTL (GFK)


RNP APCH.

Baro-VNAV NA when using Crookston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. VDP NA with Crookston altimeter setting.


When local altimeter setting not received, use Crookston altimeter setting and increase all DA 62 feet and all MDA 80 feet and increase LPV and LNAV/VNAV all Cats visibility $\frac{1}{8}$ SM, LNAV Cats C/D visibility $\frac{1}{8}$ SM, and Circling Cat C visibility $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 2600 direct ERIXE and hold.

ATIS 119.4	GRAND FORKS APP CON* 118.1 318.1	GRAND FORKS TOWER* 118.4(CTAF) 0 350.35	GND CON 124.575	CLNC DEL 135.725	UNICOM 122.95
----------------------	--	---	---------------------------	----------------------------	-------------------------

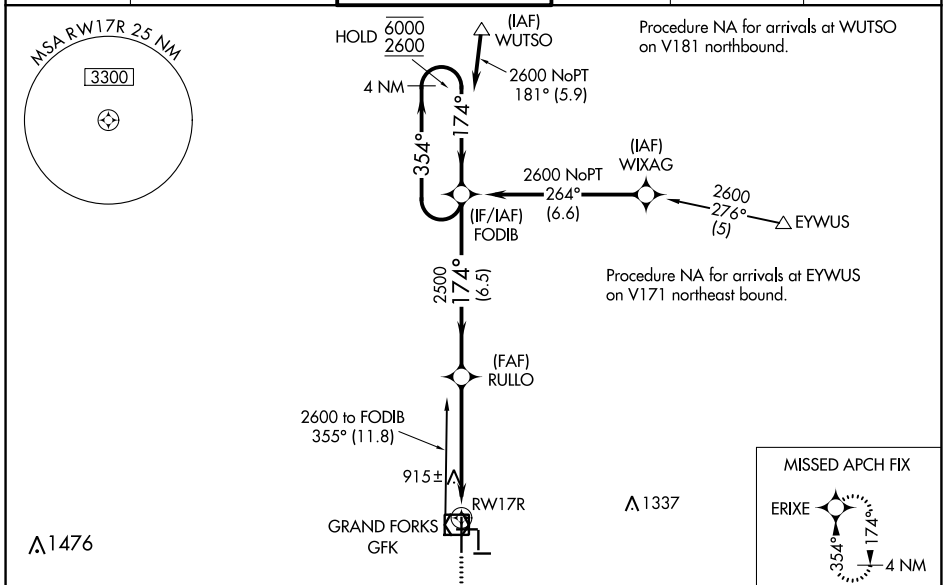

2600	ERIXE	FODIB	4 NM Holding Pattern	6000 2600
*LNAV only	*0.9 NM to RWY17R	RULLO	2500	354° → ← 174°
	0.9	4.1 NM	6.5 NM	GP 3.00° TCH 53
CATEGORY	A	B	C	D
LPV DA		1043- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)	
LNAV/VNAV DA		1093- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)	
LNAV MDA		1180-1	337 (400-1)	
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1½ 555 (600-1½)	1400-2 555 (600-2)

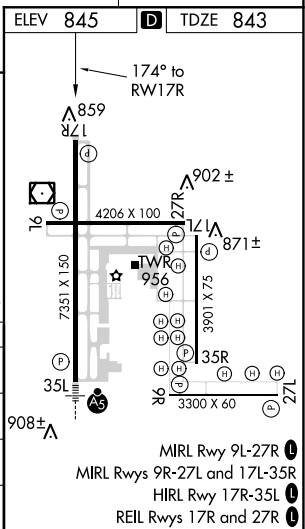

NC-1, 16 JUL 2020 to 13 AUG 2020

NC-1, 16 JUL 2020 to 13 AUG 2020