WAAS	APP CRS	Rwy Idg	5006
CH 70519	332°	TDZE	131
W33A		Apt Elev	132

RNAV (GPS) RWY 33

CURTIS L BROWN JR FIELD (EYF)

RNP APCH.

Rwy 33 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Fayetteville, NC altimeter setting and increase all DA 72 feet and LPV visibility all Cats and LNAV/VNAV all Cats visibility ¼ mile; increase all MDA 80 feet and increase LNAV visibility Cats C and D ¼ mile and Circling visibility Cat D ½ mile. Baro-VNAV and VDP NA when using Fayetteville, NC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F).

MISSED APPROACH: Climb to 3100 direct EXBEL and hold.

AWOS-3P	FAYETTEVILLE APP CON	UNICOM
119.475	133.0 290.25	122.8 (CTAF) L

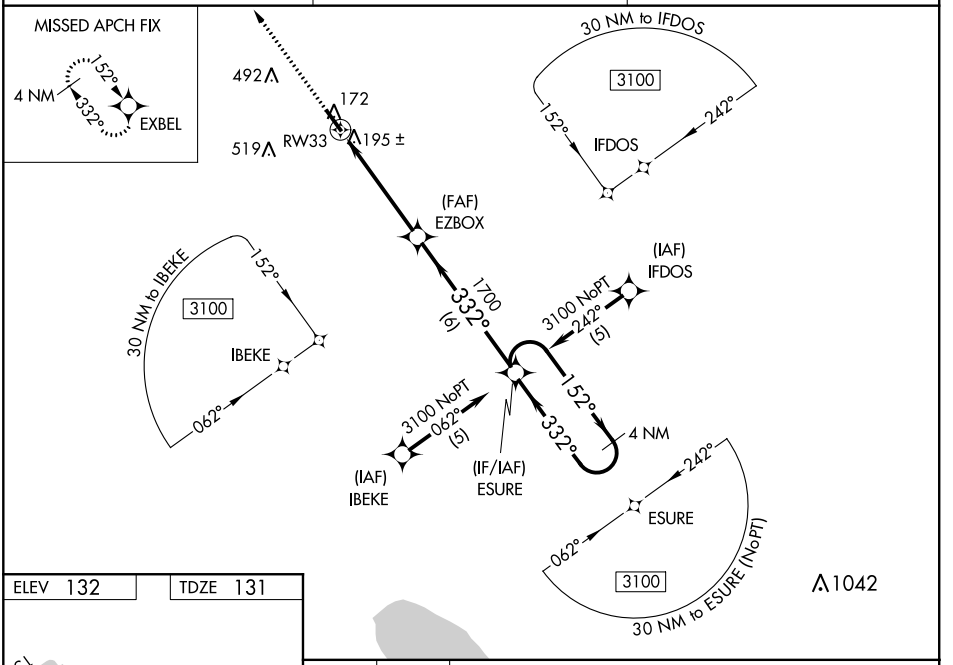

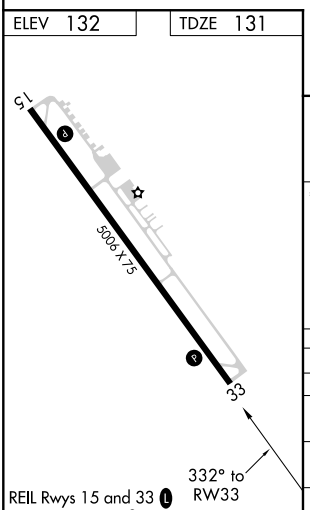

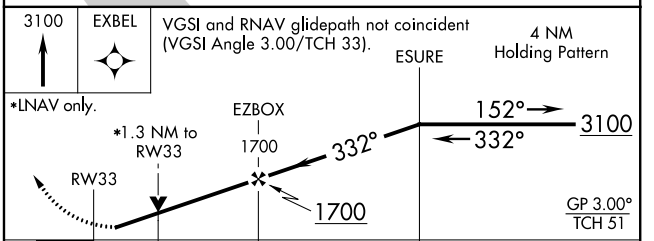

CATEGORY	A	B	C	D
LPV DA	381-¾		250 (300-¾)	
LNAV/VNAV DA	465-1¼		334 (400-1¼)	
LNAV MDA	580-1	449 (500-1)	580-1¼ 449 (500-1¼)	580-1½ 449 (500-1½)
CIRCLING	580-1 448 (500-1)	600-1 468 (500-1)	600-1½ 468 (500-1½)	800-2 668 (700-2)

SE-2, 13 AUG 2020 to 10 SEP 2020
SE-2, 13 AUG 2020 to 10 SEP 2020