


WAAS CH 93839 W28E	APP CRS 275°	Rwy Idg TDZE Apt Elev	7500 667 680
--	------------------------	-----------------------------	---


RNAV (GPS) Y RWY 28L

CHICAGO O'HARE INTL (ORD)

RNP APCH: Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations.		ALSF-2 	MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWERS 128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L) 120.75 121.15 126.9 132.7 348.0 (CENTER)	GND CON (TWR CENTER) 121.75 (OBND) (TWR NORTH) 118.05 (TWR SOUTH) 121.9 (IBND) 226.675 (ALL TWRs)

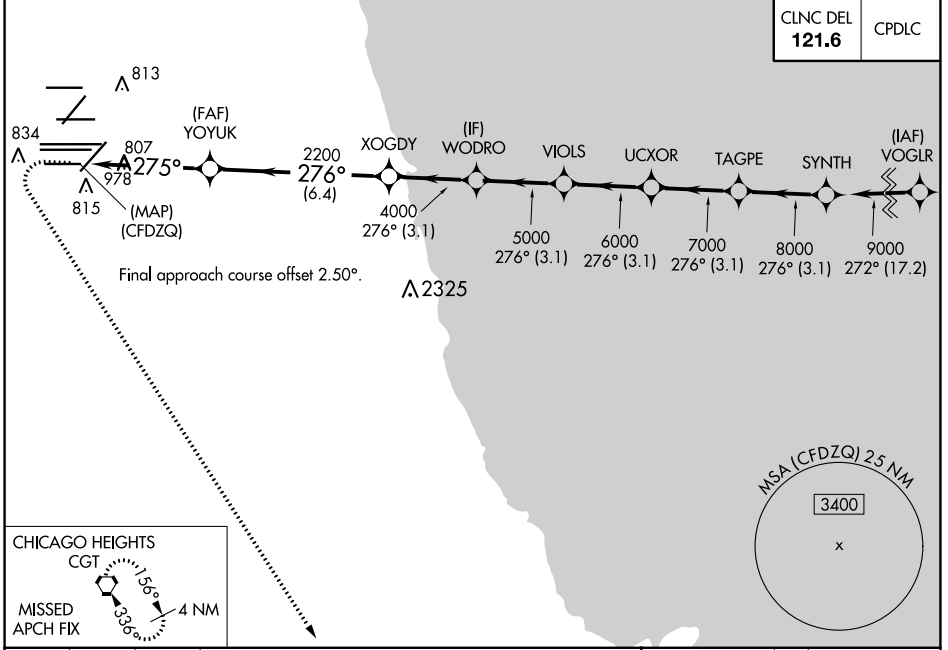

1200	4000	CGT	SYNTH
* LNAV only			
1.1	3.6 NM	6.4 NM	3.1 NM
YOYUK	XOGDY	WODRO	VIOLS
2200	4000	5000	6000
275°			
UCXOR	TAGPE	SYNTH	
7000	8000	9000	
3.1 NM	3.1 NM	3.1 NM	3.1 NM
DA	917/24	250 (300-1/2)	
DA	1090/40	423 (500-3/4)	
MDA	1060/24	393 (400-1/2)	1060/35 393 (400-5/8)

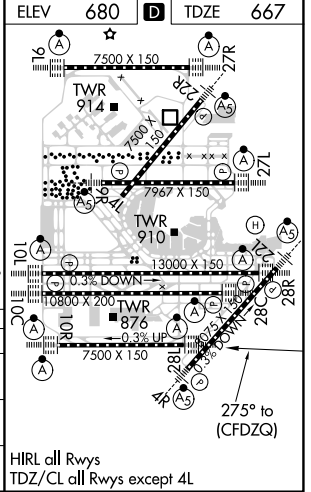

EC-3, 10 SEP 2020 to 08 OCT 2020

EC-3, 10 SEP 2020 to 08 OCT 2020