ILS or LOC RWY 15

LAKE CHARLES RGNL (LCH)

LOC/DME I-LCH	APP CRS	Rwy Idg 6500
109.1	152°	TDZE 12
Chan 28		Apt Elev 15

For inop ALS, increase S-LOC 15 Cats C and D visibility to 1⅜ mile.
** RVR 1800 authorized with use of FD or AP or HUD to DA.
ASR

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct LCH VORTAC and hold.

ATIS	LAKE CHARLES APP CON ★	LAKE CHARLES TOWER ★	GND CON	CLNC DEL	UNICOM
118.75	119.35 353.75	120.7 (CTAF) L 257.8	121.8	126.25	122.95

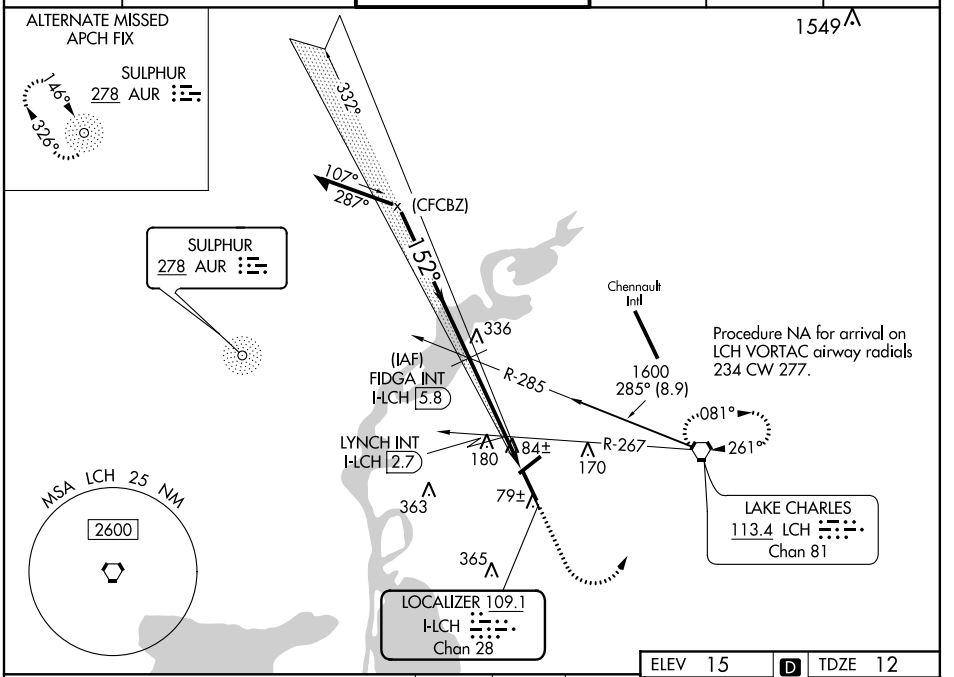

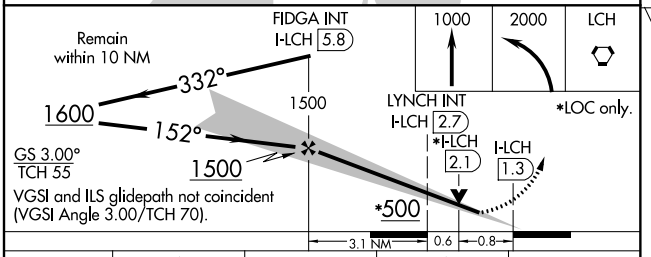

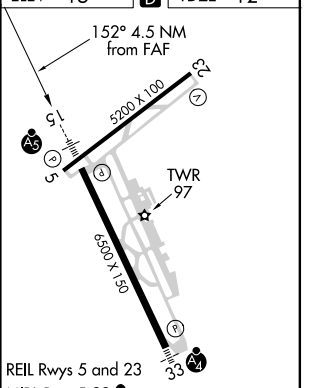

CATEGORY	A	B	C	D
S-ILS 15 **	212/24 200 (200-½)			
S-LOC 15	500/24 488 (500-½)		500/50 488 (500-1)	
C CIRCLING	500-1 485 (500-1)		580-1½ 565 (600-1½)	680-2 665 (700-2)
LYNCH FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 15	340/24 328 (400-½)		340/26 328 (400-½)	
C CIRCLING	440-1 425 (500-1)	480-1 465 (500-1)	580-1½ 565 (600-1½)	680-2 665 (700-2)

FAF to MAP 4.5 NM					
Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

SC-4, 10 SEP 2020 to 08 OCT 2020
SC-4, 10 SEP 2020 to 08 OCT 2020