

LOC I-CWF	APP CRS	Rwy Idg	10702
110.7	150°	TDZE	16
		Apt Elev	17

ILS or LOC RWY 15

CHENNAULT INTL (CWF)



From CEVKU: RNAV 1-GPS required.

▼ When local altimeter setting not received, use Lake Charles Rgnl altimeter setting and increase all DA 37 feet and all MDA 40 feet. For inop ALS, increase S-ILS 15 Cat E visibility to ¾ SM, and S-LOC 15 Cats C/D/E to 1 ¼ SM. For inop ALS when using Lake Charles altimeter settings, increase S-ILS 15 Cat E visibility to ¾ SM, and S-LOC 15 Cat E to 1 ¼ SM.



▲ MISSED APPROACH: Climb to 2000 direct LCH VORTAC and hold.



ATIS	LAKE CHARLES APP CON*	CHENNAULT TOWER*	GND CON	UNICOM
120.0	119.8 282.3	124.2 (CTAF) 290.4	121.65 275.8	122.95

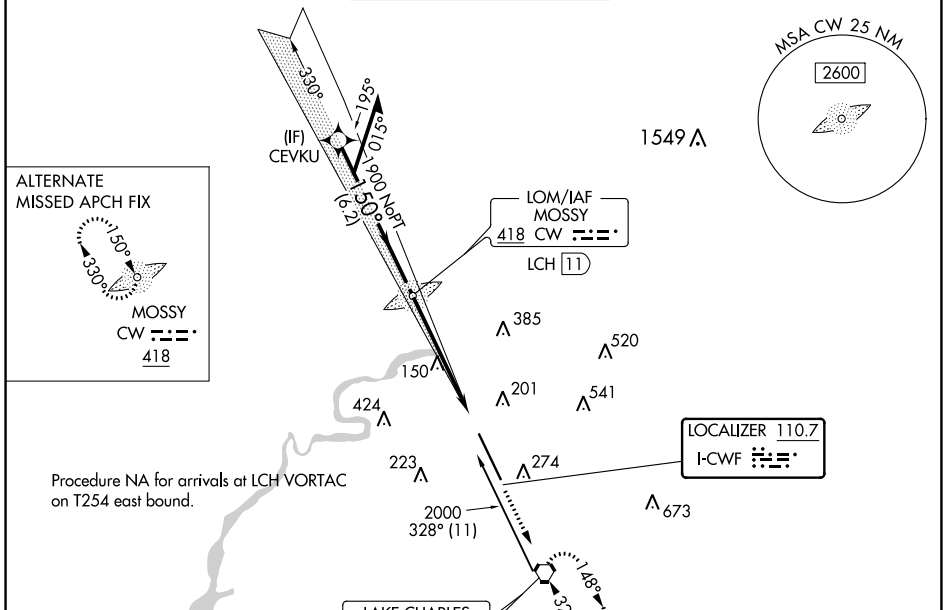

Procedure NA for arrivals at LCH VORTAC on T254 east bound.

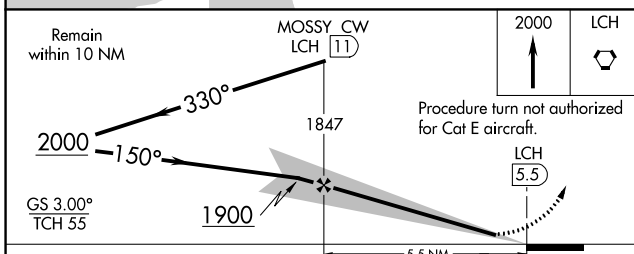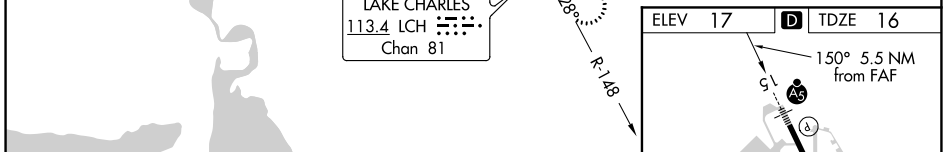

CATEGORY	A	B	C	D	E		
S-ILS 15	216-1/2					200 (200-1/2)	
S-LOC 15	400-1/2	384 (400-1/2)	400-3/4		384 (400-3/4)		
CIRCLING	640-1	623 (700-1)	640-1 3/4	740-2 1/4	900-3		
			623 (700-1 3/4)	723 (800-2 1/4)	883 (900-3)		
	FAF to MAP 5.5 NM						
	Knots	60	90	120	150	180	
	Min:Sec	5:30	3:40	2:45	2:12	1:50	

SC-4, 10 SEP 2020 to 08 OCT 2020

SC-4, 10 SEP 2020 to 08 OCT 2020