


WAAS CH 40208 W35A	APP CRS 355°	Rwy Idg TDZE 163 Apt Elev 214
--	------------------------	---

RNAV (GPS) RWY 35


BOB SIKES (CEW)

RNP APCH.	<p>MISSED APPROACH: Climb to 2000 direct WEDOM and hold.</p>
<p>Baro-VNAV and VDP NA when using Eglin AFB altimeter setting. Rwy 35 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. When local altimeter setting not received, use Eglin AFB altimeter setting and increase LPV DA to 509, LNAV/VNAV DA to 550, and all MDA 60 feet, increase LNAV Cat C/D visibility 1/2 SM.</p>	

ASOS 119.275	EGLIN APP CON 124.05 284.65	UNICOM 122.95 (CTAF) 0
------------------------	---------------------------------------	---

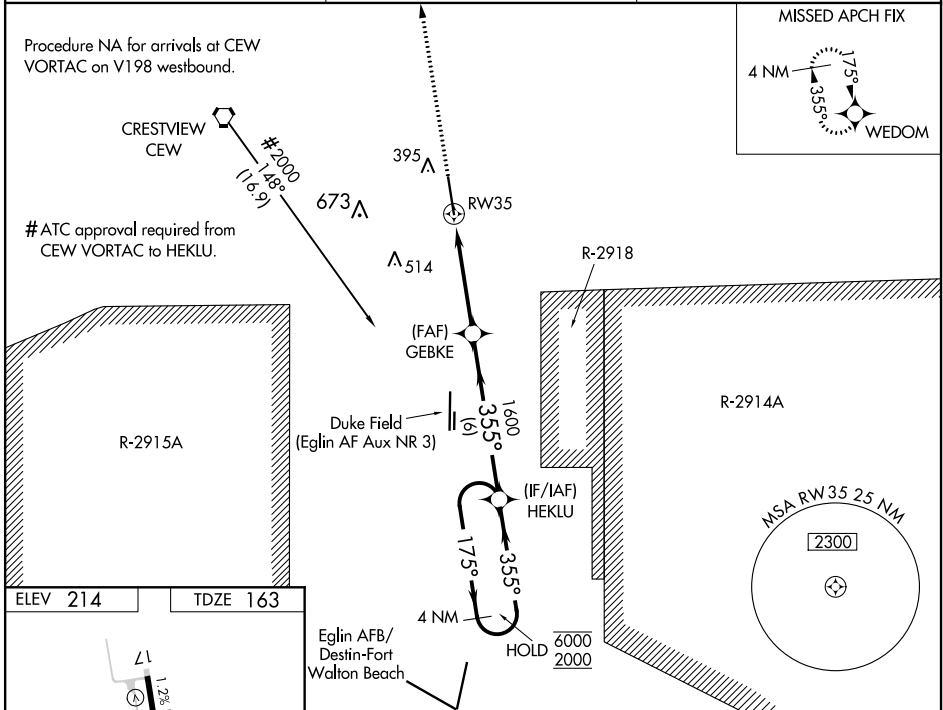

ELEV 214	TDZE 163	2000 WEDOM	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 62).	4 NM Holding Pattern
----------	----------	------------	--	----------------------

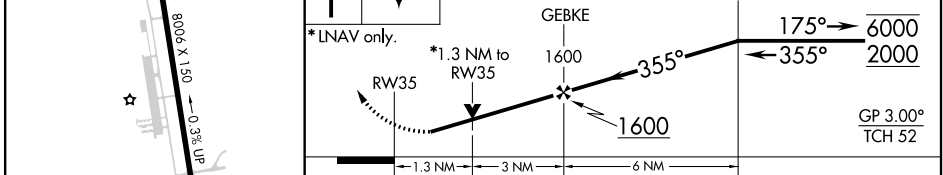

CATEGORY	A	B	C	D
LPV DA		450-1	287 (300-1)	
LNAV/VNAV DA		491-1 1/4	328 (300-1 1/4)	
LNAV MDA	640-1	477 (500-1)	640-1 3/8	477 (500-1 3/8)

SE-3, 10 SEP 2020 to 08 OCT 2020

SE-3, 10 SEP 2020 to 08 OCT 2020

