RNAV (GPS) RWY 10

MIAMI HOMESTEAD GENERAL AVIATION (X51)

WAAS	APP CRS	Rwy Idg	3000
CH 42825	096°	TDZE	7
W10A		Apt Elev	7

Baro-VNAV NA when using Miami Executive altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Miami Executive altimeter setting: increase LPV DA to 284; increase LNAV/VNAV DA to 284; increase all MDA 40 feet.

NA

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct HOLMU and hold.

AWOS-3	MIAMI APP CON	UNICOM
118.375	125.5 354.1	122.8 (CTAF)

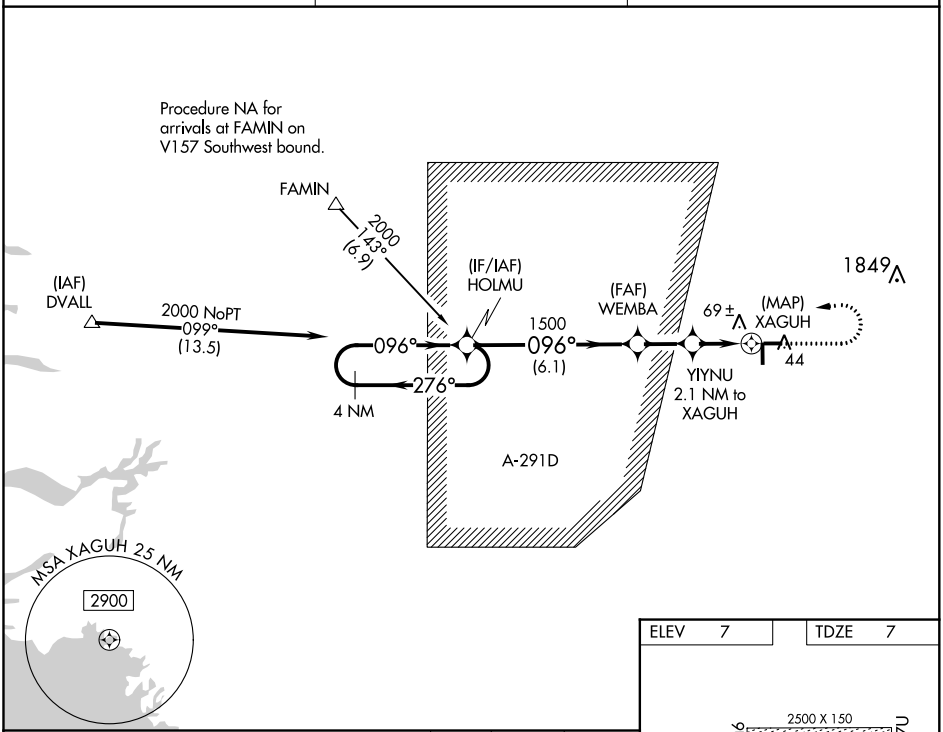

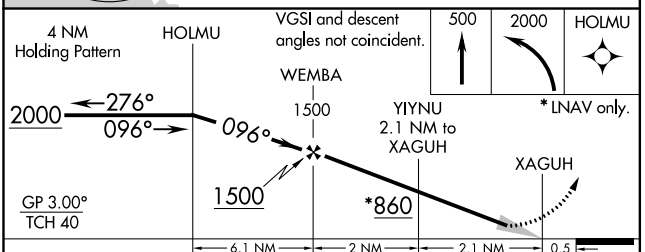

CATEGORY	A	B	C	D
LPV DA	257-⅞	250 (300-⅞)	NA	
LNAV/VNAV DA	257-⅞	250 (300-⅞)	NA	
LNAV MDA	320-1	313 (400-1)	NA	
CIRCLING	380-1 373 (400-1)	460-1 453 (500-1)	NA	

ELEV 7 TDZE 7



MIRL Rwys 18-36 and 10-28

SE-3, 10 SEP 2020 to 08 OCT 2020
SE-3, 10 SEP 2020 to 08 OCT 2020