

LOC I-CCI <b>108.9</b>	APP CRS <b>334°</b>	Rwy Idg TDZE Apt Elev	<b>9001</b> <b>45</b> <b>46</b>
---------------------------	------------------------	-----------------------------	---------------------------------------

# ILS or LOC RWY 33


CHARLESTON AFB/INTL (CHS)

**▼** DME from CHS VORTAC. Simultaneous reception of I-CCI and CHS DME required. DME Required. For inop MALSR, increase S-ILS 33 Cat E visibility to RVR 4000 and S-LOC 33 Cat E visibility to 1 $\frac{3}{8}$ .  
**▲** \*\* RVR 1800 authorized with use of FD or AP or HUD to DA.




**MISSED APPROACH:** Climb to 500 then climbing left turn to 2100 on heading 280° and on CHS VORTAC R-300 to GISTS/15.7 DME and hold.

ATIS <b>124.75</b>	CHARLESTON APP CON <b>120.7 306.925</b>	CHARLESTON TOWER <b>126.0 239.0</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>127.325 291.65</b>	CPDLC
-----------------------	--	--	-------------------------------	-----------------------------------	-------

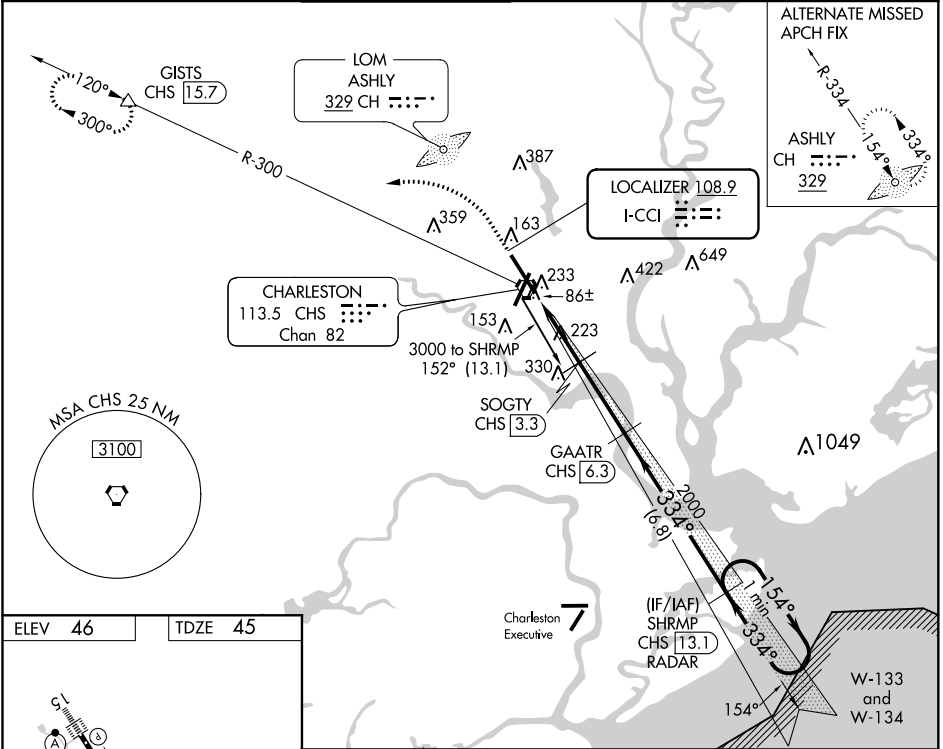

ELEV 46	TDZE 45
---------	---------

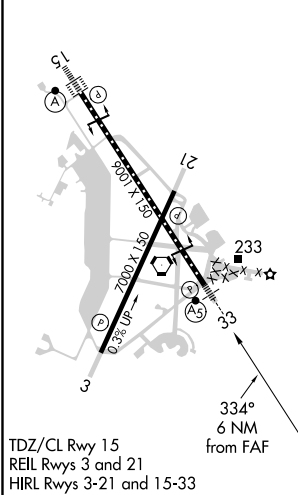

500	2100	CHS R-300	GISTS	GAATR CHS 6.3	SHRMP CHS 13.1 RADAR	One Minute Holding Pattern
↑	hdg 280°		△			GS 3.00° TCH 51
*LOC only.		SOGTY CHS 3.3				
		*CHS 1.5		2000		154° → 3000
		CHS 0.3		1040*		← 334°
VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 59).						
1.2 NM		1.8 NM		3 NM		6.8 NM
CATEGORY	A		B		C	
S-ILS 33 **			245/24		200 (200- $\frac{1}{2}$ )	
S-LOC 33	480/24		435 (500- $\frac{1}{2}$ )		480/45 435 (500- $\frac{3}{8}$ )	
CIRCLING	540-1		494 (500-1)		540-1 $\frac{1}{2}$ 600-2 740-2 $\frac{1}{2}$ 494 (500-1 $\frac{1}{2}$ ) 554 (600-2) 694 (700-2 $\frac{1}{2}$ )	

SE-2, 08 OCT 2020 to 05 NOV 2020

SE-2, 08 OCT 2020 to 05 NOV 2020