

APP CRS	Rwy Idg	9001
334°	TDZE	45
	Apt Elev	46

RNAV (RNP) Z RWY 33



CHARLESTON AFB/INTL (CHS)

▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). RF Required. GPS required. For inop MALSR, increase RNP 0.23 all Cats visibility to 1½ and RNP 0.30 all Cats visibility to 1½.




MISSED APPROACH: Climb to 3000 on track 334° to MAMAE and hold.

ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL	CPDLC
124.75	120.7 306.925	126.0 239.0	121.9 348.6	127.325 291.65	

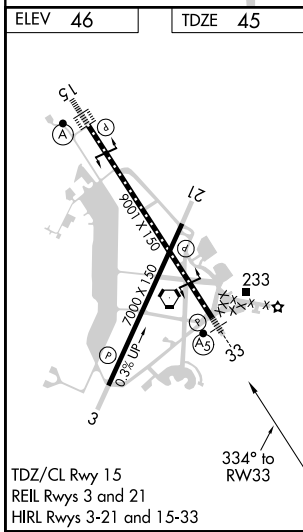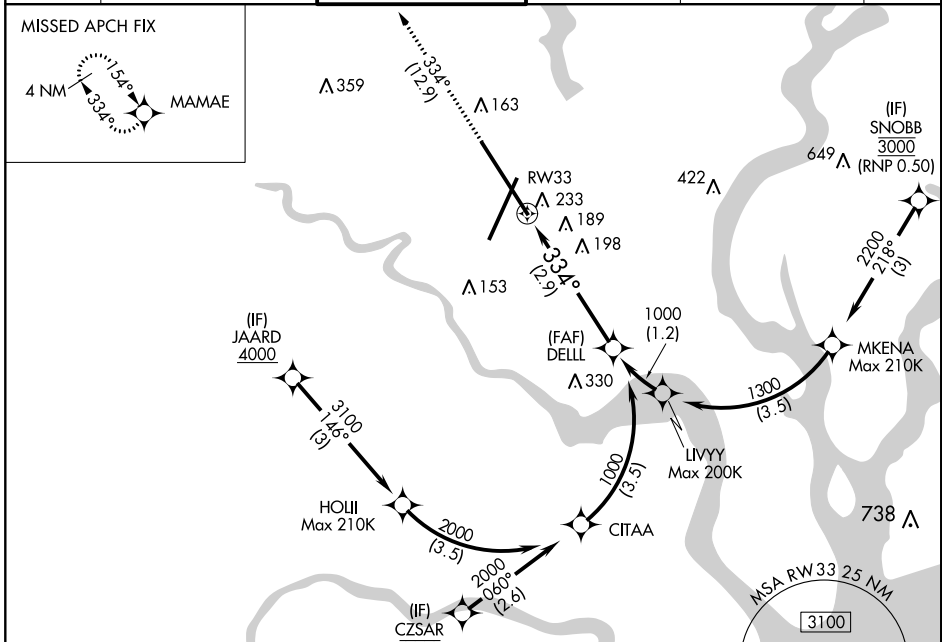

ELEV	46	TDZE	45
------	----	------	----

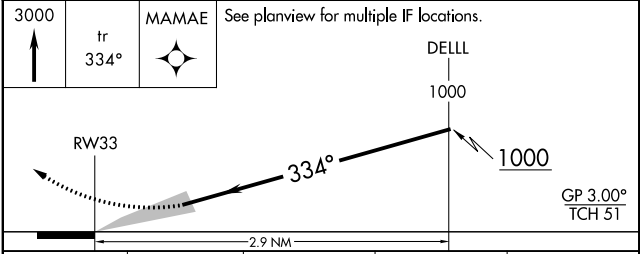

CATEGORY	A	B	C	D
RNP 0.23 DA		442/45	397 (400-7%)	
RNP 0.30 DA		516/60	471 (500-1¼)	

AUTHORIZATION REQUIRED

SE-2, 08 OCT 2020 to 05 NOV 2020

SE-2, 08 OCT 2020 to 05 NOV 2020