

WAAS CH 63218 W33A	APP CRS 334°	Rwy Idg TDZE Apt Elev	9001 45 46
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 33


CHARLESTON AFB/INTL (CHS)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). For inoperative MALS, increase LNAV/VNAV all Cats visibility to 1½ miles and LNAV Cats C/D visibility to 1¾ miles. DME/DME RNP-0.3 NA.
****RVR 1800 authorized with use of FD or AP or HUD to DA.**





MISSED APPROACH:
Climb to 3000 direct MAMAE and hold.

ATIS 124.75	CHARLESTON APP CON 120.7 306.925	CHARLESTON TOWER 126.0 239.0	GND CON 121.9 348.6	CLNC DEL 127.325 291.65	CPDLC
-----------------------	--	--	-------------------------------	-----------------------------------	-------

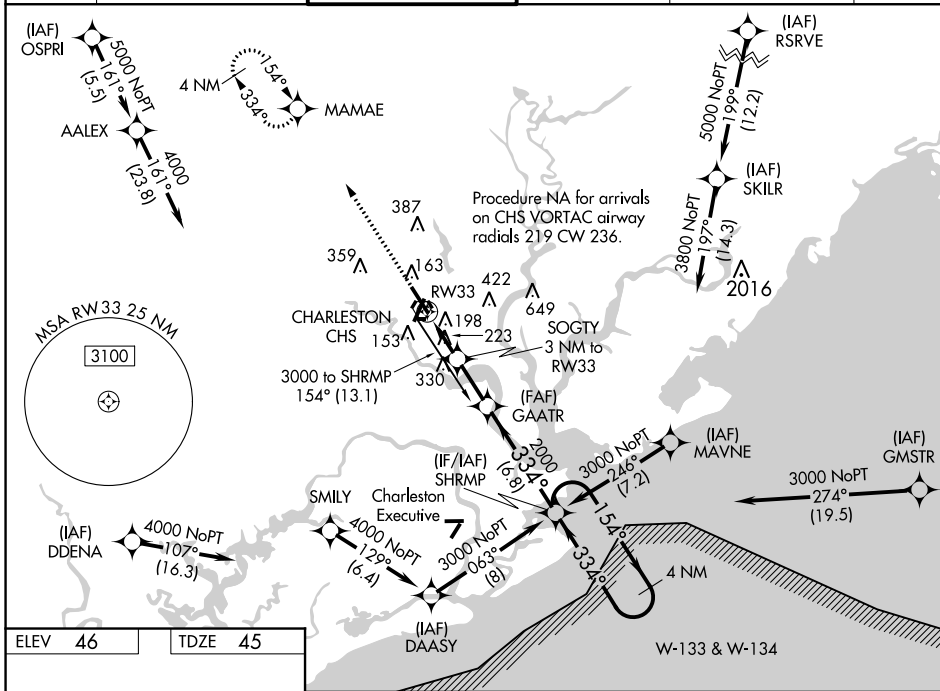

ELEV 46	TDZE 45
----------------	----------------

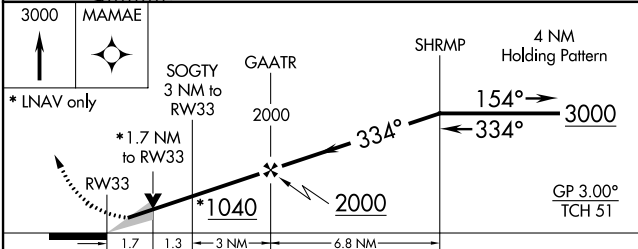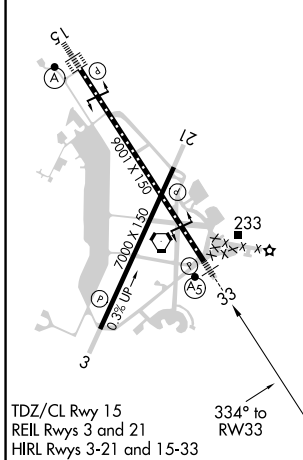

CATEGORY	A	B	C	D
LPV DA **		245/24	200 (200-½)	
LNAV/VNAV DA		504/60	459 (500-1¼)	
LNAV MDA	640/24	595 (600-½)	640-1¾	595 (600-1¾)
CIRCLING	640-1	594 (600-1)	640-1¾ 594 (600-1¾)	640-2 594 (600-2)

SE-2, 08 OCT 2020 to 05 NOV 2020

SE-2, 08 OCT 2020 to 05 NOV 2020