

LOC I-HER 110.5	APP CRS 342°	Rwy Idg 5003
		TDZE 121
		Apt Elev 121

LOC RWY 35
NATCHITOCHE RGNL (I.E.R.)




ADF REQUIRED

Helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Alexandria Intl altimeter setting and increase all MDA 100 feet and all Cat C visibilities 1/4 mile. For inoperative ODALS when using Alexandria Intl altimeter setting, increase S-35 Cat C visibility 1/8 mile. Inoperative table does not apply to S-35 Cat A/B. ADF Required.

ODALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct OOC NDB and hold.

AWOS-3 119.025	POLK APP CON 125.4 302.2	GCO 135.075	UNICOM 122.8(CTAF) 0
--------------------------	------------------------------------	-----------------------	--------------------------------

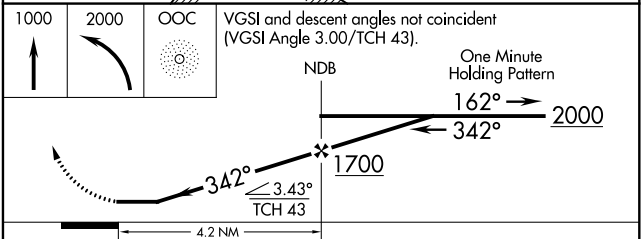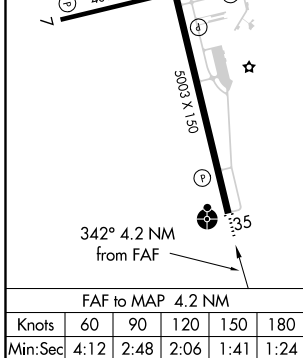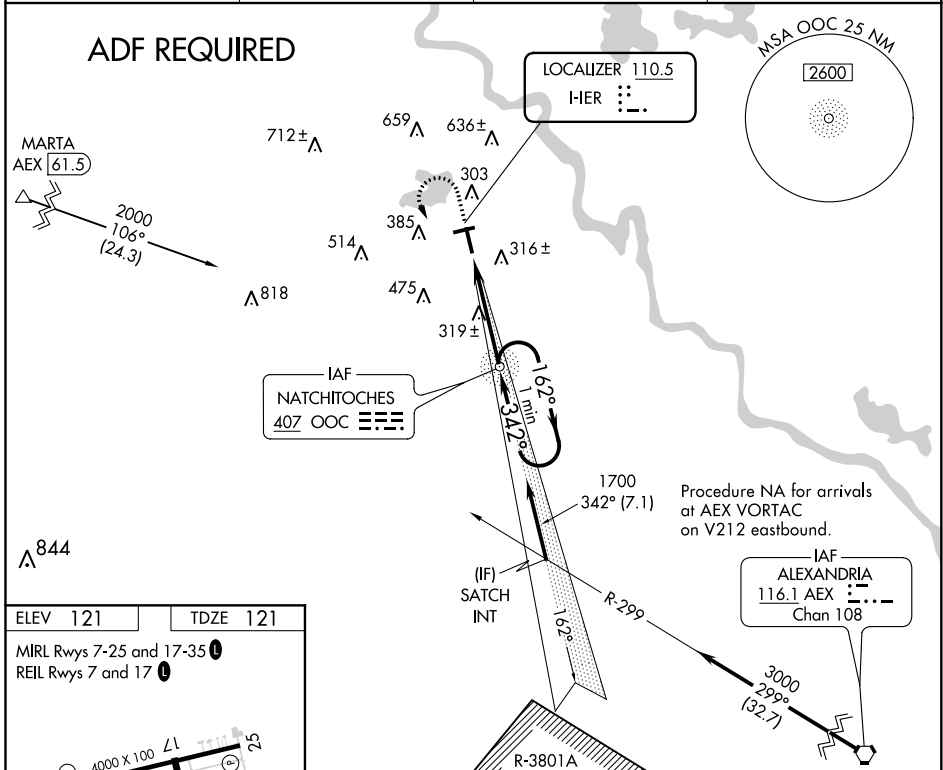

CATEGORY	A	B	C	D
S-35	580-1	459 (500-1)	580-1 1/8 459 (500-1 1/8)	NA
CIRCLING	680-1 559 (600-1)	740-1 619 (700-1)	740-1 3/4 619 (700-1 3/4)	NA

SC-4, 08 OCT 2020 to 05 NOV 2020

SC-4, 08 OCT 2020 to 05 NOV 2020