RNAV (GPS) Y RWY 18L

CHARLOTTE/DOUGLAS INTL (CLT)

WAAS	APP CRS		
CH 77500	183°	Rwy Idg	8676
W18A		TDZE	748
		Apt Elev	748

RNP APCH.

Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Rwy 18L helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C.

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct LOCAS and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER			GND CON		CLNC DEL
ARR 121.15	(001°-119°)	128.32	(Rwys 18L-36R, 5-23)	118.1	257.8	121.8	348.6 (WEST)	127.15
DEP 132.1	(120°-295°)	120.05	(Rwy 18C-36C)	126.4	257.8	121.9	348.6 (EAST)	348.6
	(296°-360°)	134.75	(Rwy 18R-36L)	133.35	257.8			CPDLC
	(180°-359°)	257.2						
	(360°-179°)	307.8						

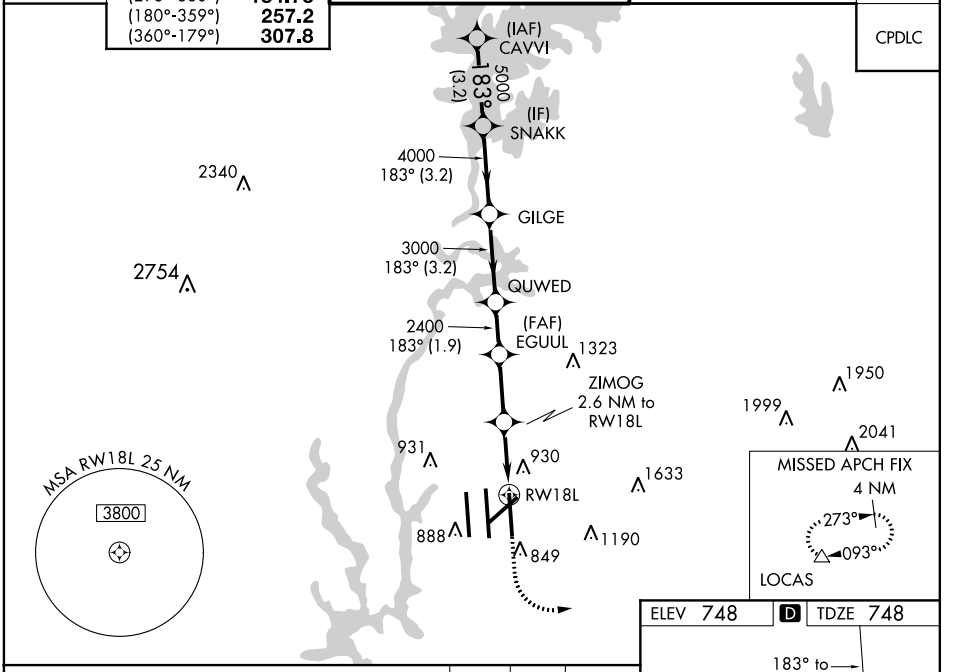

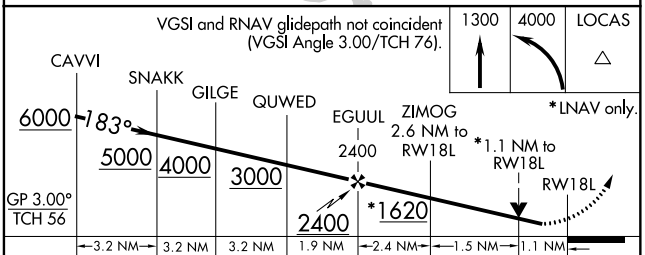

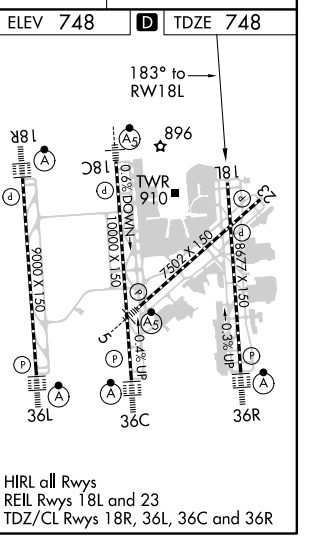

CATEGORY	A	B	C	D
LPV DA	1002/40	254 (300-¾)		
LNAV/VNAV DA	1216-1⅜	468 (500-1⅜)		
LNAV MDA	1180/55	432 (500-1)	1180-1¼	432 (500-1¼)
C CIRCLING	1380-1	632 (700-1)	1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)

HIRL all Rwys
REIL Rwys 18L and 23
TDZ/CL Rwys 18R, 36L, 36C and 36R

SE-2, 25 MAR 2021 to 22 APR 2021
SE-2, 25 MAR 2021 to 22 APR 2021