


APP CRS	Rwy Idg	5810
228°	TDZE	611
	Apt Elev	620

RNAV (RNP) X RWY 22L



CHICAGO MIDWAY INTL (MDW)

RF required. RNP AR APCH.		MISSED APPROACH: Climb to 1300 then climbing left turn to 2600 direct EON VORTAC and hold.			
▼ For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C.					


D-ATIS 132.75	CHICAGO APP CON 128.2 353.875	MIDWAY TOWER 135.2 269.125	GND CON 121.65	CLNC DEL 124.625	CPDLC
-------------------------	---	--------------------------------------	--------------------------	----------------------------	-------

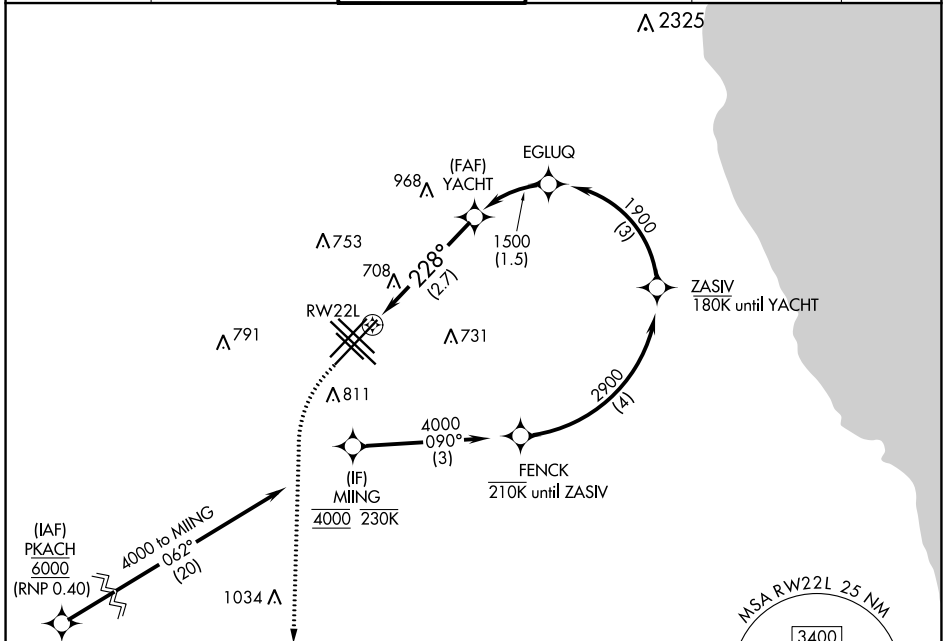

ELEV 620	D	TDZE 611
----------	----------	----------



1300	2600	EON	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).
------	------	-----	--

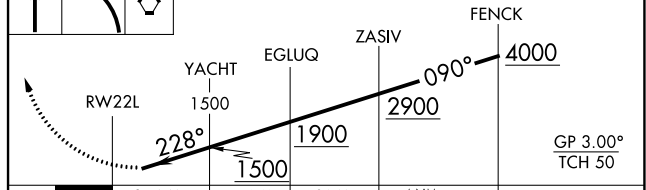

HIRL Rws 13C-31C and 4R-22L
MIRL Rws 4L-22R, 13L-31R, and 13R-31L
REIL Rws 4R, 22L, and 31C
RLLS Rws 13C and 31C

CATEGORY	A	B	C	D
RNP 0.18 DA		951/50	340 (400-1)	
RNP 0.30 DA		1001/60	390 (400-1¼)	

AUTHORIZATION REQUIRED