
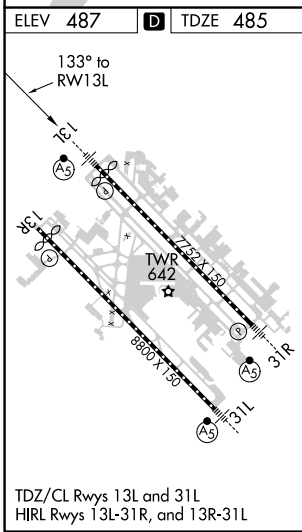


WAAS CH <b>99723</b> <b>W13B</b>	APP CRS <b>133°</b>	Rwy ldg <b>7352</b> TDZE <b>485</b> Apt Elev <b>487</b>
--	------------------------	---

# RNAV (GPS) Z RWY 13L

DALLAS LOVE FIELD (DAL)

RNP APCH. <b>▽</b> Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. <b>△</b> LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to RVR 5500.		MALSRL 	MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct SOLDO and hold.		
D-ATIS <b>120.15</b>	REGIONAL APP CON NORTH <b>124.3 282.275</b> SOUTH <b>125.2 343.65</b>	LOVE TOWER <b>123.7 239.3</b>	GND CON <b>121.75 348.6</b>	CLNC DEL <b>127.9</b>	CPDLC

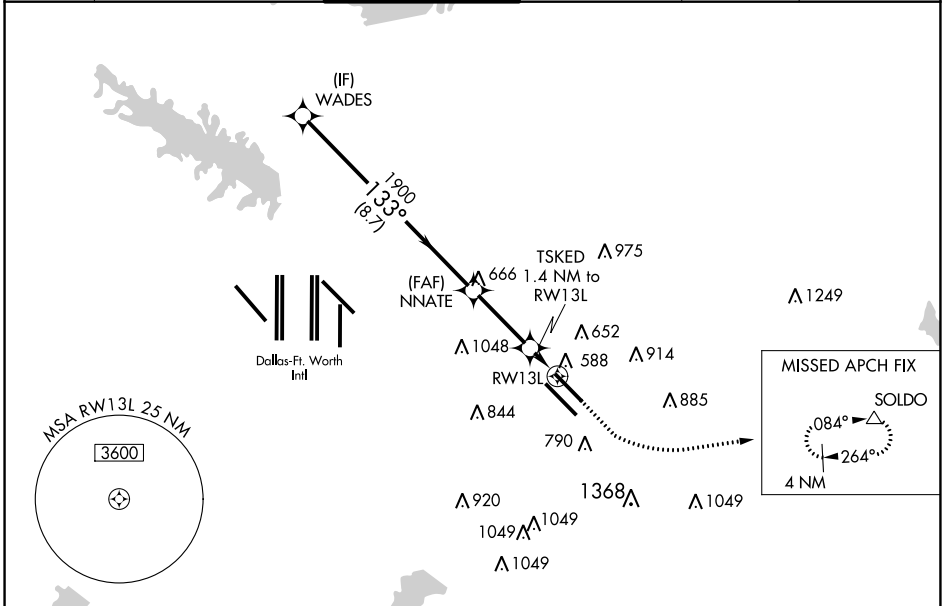

ELEV <b>487</b>	<b>D</b>	TDZE <b>485</b>		
GP 3.00°	TCH 55			
CATEGORY	A	B	C	D
LPV DA	685/18		200 (200-½)	
LNAV/VNAV DA	764/24		279 (300-½)	
LNAV MDA	840/24		840/30	
	355 (400-½)		355 (400-¾)	
<b>C</b> CIRCLING	1000-1 513 (600-1)		1520-3 1033 (1100-3)	
	1140-1 653 (700-1)		1220-2 733 (800-2)	

SC-2, 25 MAR 2021 to 22 APR 2021

SC-2, 25 MAR 2021 to 22 APR 2021