

WAAS CH <b>45810</b> <b>W34A</b>	APP CRS <b>344°</b>	Rwy Idg TDZE <b>379</b> Apt Elev <b>433</b>
--	------------------------	---





# RNAV (GPS) Y RWY 34L

SEATTLE-TACOMA INTL (SEA)

**▼** DME/DME RNP -0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. Simultaneous approach authorized with Rwy 34R/C. For inoperative ALS, increase LNAV/VNAV all Cats visibility to 1 $\frac{1}{2}$  SM, increase LNAV Cat A and B visibility to RVR 5500 and Cat C and D visibility to 1 $\frac{1}{2}$  SM. #RVR 1800 authorized with use of FD or AP or HUD to DA.

**MALS**  
MISSED APPROACH: Climb to 900 then climbing left turn to 5000 direct LOFAL and hold.

D-ATIS <b>118.0</b>	SEATTLE APP CON <b>133.65 273.45</b>	SEATTLE TOWER <b>119.9 239.3</b> (Rwys 16L, 16C, 34C, 34R) <b>120.95 239.3</b> (Rwys 16R, 34L)	GND CON <b>121.7</b>	CLNC DEL <b>128.0</b>	CPDLC
------------------------	---	--	-------------------------	--------------------------	-------

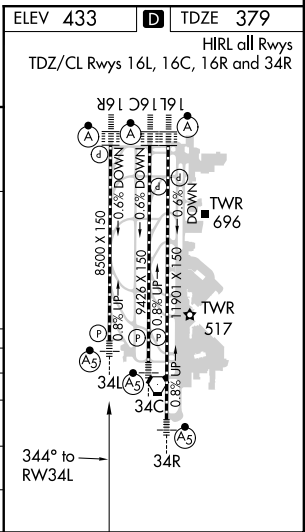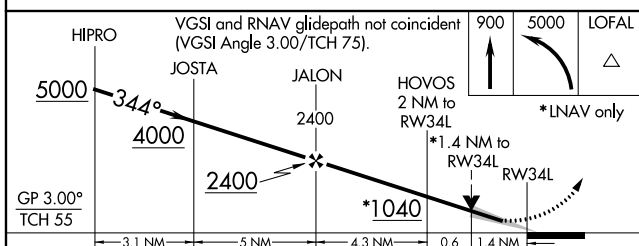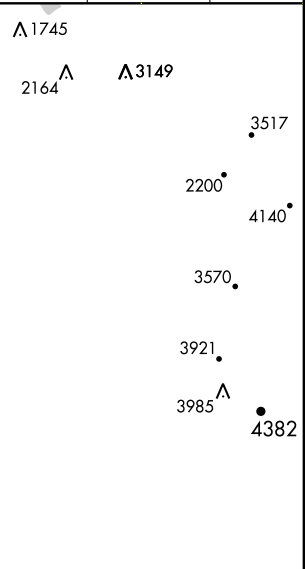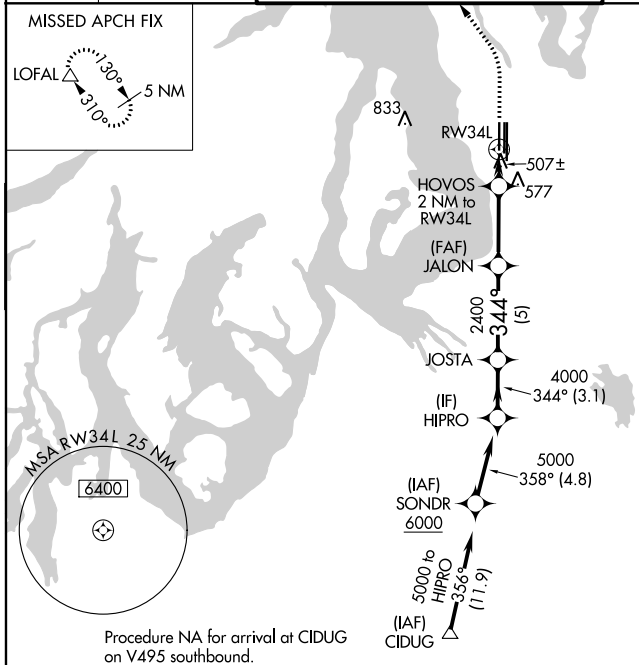

CATEGORY	A	B	C	D
LPV DA#		579/24	200 (200- $\frac{1}{2}$ )	
LNAV/VNAV DA		808/40	429 (400- $\frac{3}{4}$ )	
LNAV MDA	860/24	481 (500- $\frac{1}{2}$ )	860/55	481 (500-1)
CIRCLING	1000-1	567 (600-1)	1000-1 $\frac{1}{2}$ 567 (600-1 $\frac{1}{2}$ )	1000-2 567 (600-2)

NW-1, 09 SEP 2021 to 07 OCT 2021

NW-1, 09 SEP 2021 to 07 OCT 2021