RNAV (GPS) RWY 17

SALT LAKE CITY INTL (SLC)

WAAS	APP CRS	Rwy Idg	9596
CH 82338	169°	TDZE	4219
W17A		Apt Elev	4227

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 49°C (121°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to RVR 6000, and LNAV Cat C/D/E visibility to 1⅜ SM. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 4700 then climbing left turn to 10000 direct FFU VORTAC and hold.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON	CLNC DEL	CPDLC
124.75 125.625	125.7 284.6	118.3 257.8	121.9 348.6	127.3 379.975	

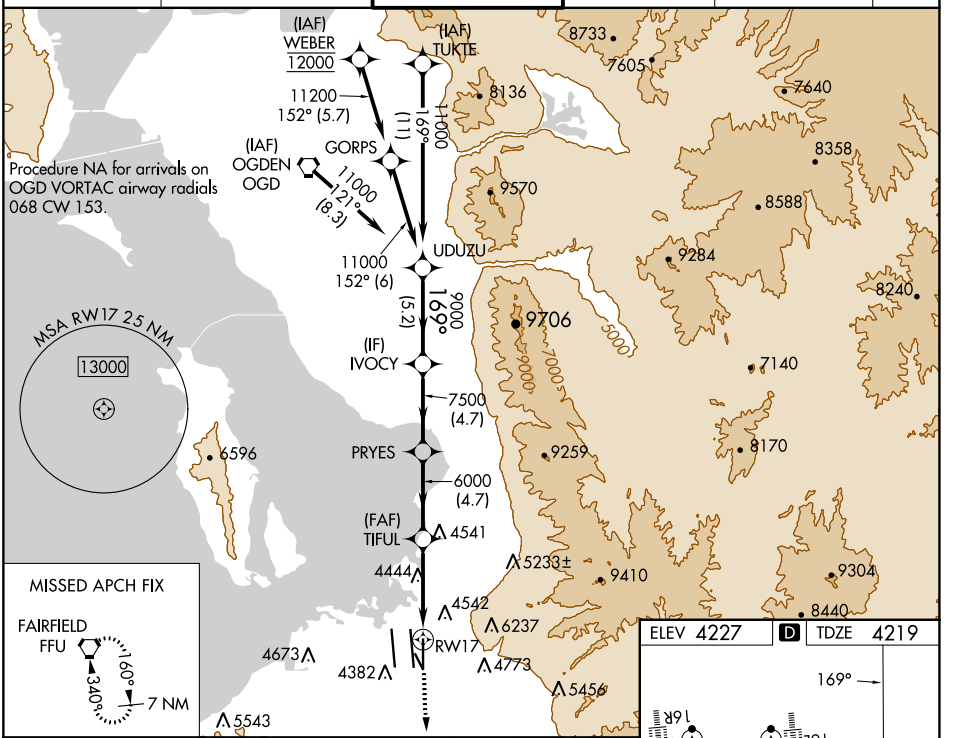

MISSED APCH FIX

FAIRFIELD
FFU
160°
340°
7 NM

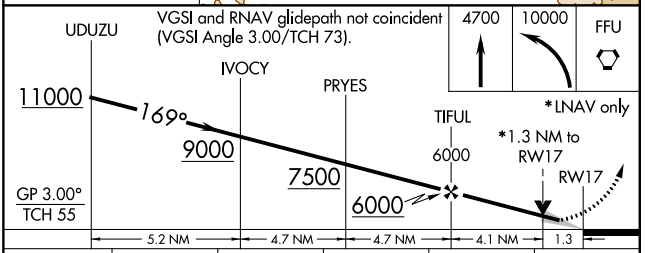

CATEGORY	A	B	C	D	E
LPV DA	4419/18 200 (200-½)				
LNAV/VNAV DA	4571/30 352 (400-⅝)				
LNAV MDA	4700/24 481 (500-½)		4700/50 481 (500-1)		

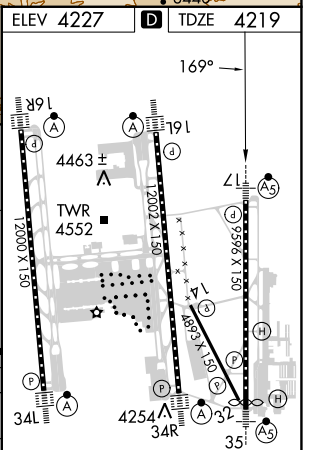

HIRL all Rwys
TDZ/CL Rwys 16L, 16R, 17, 35, 34L, and 34R

SW-4, 22 FEB 2024 to 21 MAR 2024
SW-4, 22 FEB 2024 to 21 MAR 2024