


LOC I-SPI <b>109.5</b>	APP CRS <b>043°</b>	Rwy Idg 7927
		TDZE 592
		Apt Elev 598


# ILS or LOC RWY 4

ABRAHAM LINCOLN CAPITAL (SPI)

ADF Required.		SPRINGFIELD TOWER ★		GND CON	CLNC DEL	UNICOM		
<p>⚠ When local altimeter setting not received, use Lincoln altimeter setting and increase all DA 57 feet, all MDA 60 feet, increase S-LOC and Circling Cat C/D visibility ¼ mile. For inop ALS when using Lincoln altimeter setting, increase S-LOC 4 Cats C and D visibility to 1⅓ SM. ASR *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Lincoln altimeter setting).</p>		<p>★ ATIS <b>127.65 270.1</b></p>		<p>★ SAINT LOUIS APP CON <b>126.15 323.0</b></p>	<p>★ SPRINGFIELD TOWER ★ <b>121.3 (CTAF) 257.8</b></p>	<p>GND CON <b>121.9 348.6</b></p>	<p>CLNC DEL <b>121.7</b></p>	<p>UNICOM <b>122.95</b></p>

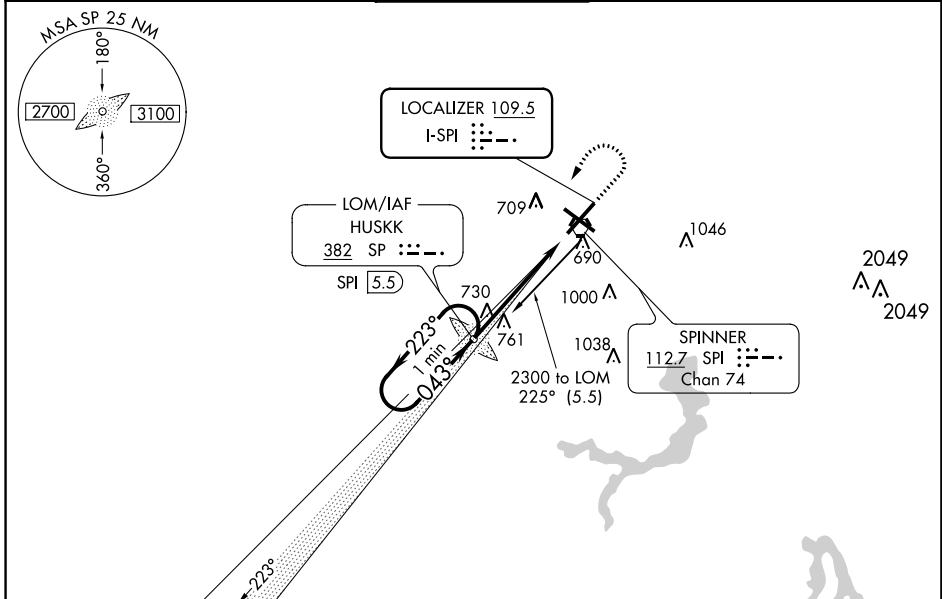

One Minute Holding Pattern	SP LOM SPI 5.5	1500	2300	SP
2300 ← 223° 043° →	2297	↑	↶	⊙
GS 3.00° TCH 56	2300	5.1 NM		
CATEGORY	A	B	C	D
S-ILS 4	* 792/24 200 (200-½)			
S-LOC 4	1020/24	428 (500-½)	1020/40	428 (500-¾)
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

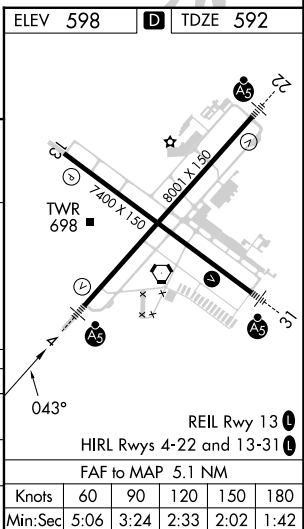

EC-3, 22 FEB 2024 to 21 MAR 2024

EC-3, 22 FEB 2024 to 21 MAR 2024