

|  |                        |                             |                                       |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>45823</b><br><b>W34A</b> | APP CRS<br><b>337°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5000</b><br><b>15</b><br><b>16</b> |
|--|------------------------|-----------------------------|---------------------------------------|

# RNAV (GPS) RWY 34




ABBEVILLE CHRIS CRUSTA MEML (IYA)

RNP APCH.

Baro-VNAV NA when using New Iberia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use New Iberia altimeter setting and increase all DA 27 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility 1/8 SM.

MISSED APPROACH: Climb to 2000 direct CIPAG and hold.

|                          |   |                       |                               |
|--------------------------|---|-----------------------|-------------------------------|
| AWOS-3<br><b>118.875</b> | LAFAYETTE APP CON ★<br><b>121.1 268.7</b> | GCO<br><b>135.075</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|--------------------------|---|-----------------------|-------------------------------|

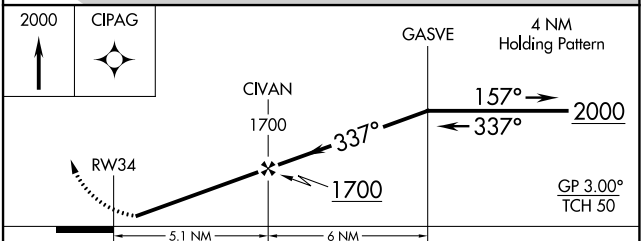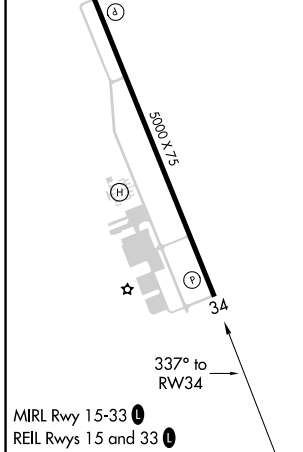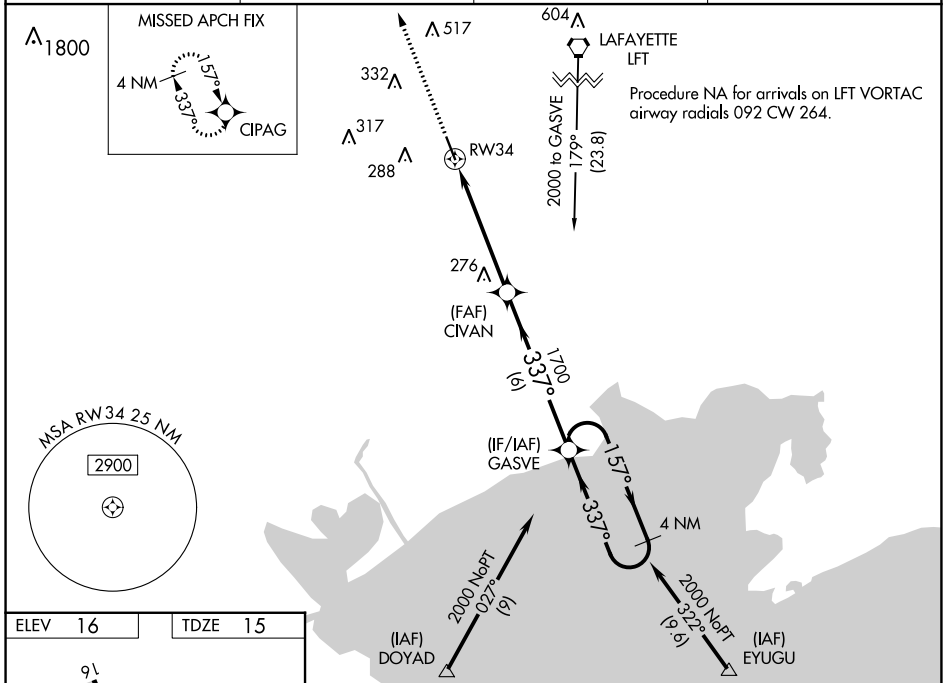

| CATEGORY     | A                    | B                    | C                      | D  |
|--------------|----------------------|----------------------|------------------------|----|
| LPV DA       | 298-1 283 (300-1)    |                      |                        | NA |
| LNAV/VNAV DA | 320-1 305 (400-1)    |                      |                        | NA |
| LNAV MDA     | 580-1                | 565 (600-1)          | 580-1½<br>565 (600-1½) | NA |
| CIRCLING     | 580-1<br>564 (600-1) | 600-1<br>584 (600-1) | 700-2<br>684 (700-2)   | NA |

SC-4, 22 FEB 2024 to 21 MAR 2024

SC-4, 22 FEB 2024 to 21 MAR 2024