

WAAS CH 42505 W31A	APP CRS 314°	Rwy Idg 6500 TDZE 487 Apt Elev 501
--	------------------------	---


RNAV (GPS) RWY 31

LANCASTER RGNL (LNC)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Baro-VNAV NA when using Dallas Exec altimeter setting. When local altimeter setting not received, use Dallas Exec altimeter setting and increase LPV DA to 732 feet; increase LNAV/VNAV DA to 970 feet and visibility all Cats ¼ SM; increase all MDAs 60 feet and LNAV Cats C/D and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct DOCAV and right turn on track 053° to WARER then climb to 3000 on track 053° to SOLDO and hold.

AWOS-3PT 118.975	REGIONAL APP CON 125.2 343.65	GCO 121.725	UNICOM 122.7 (CTAF) 0
----------------------------	---	-----------------------	---------------------------------

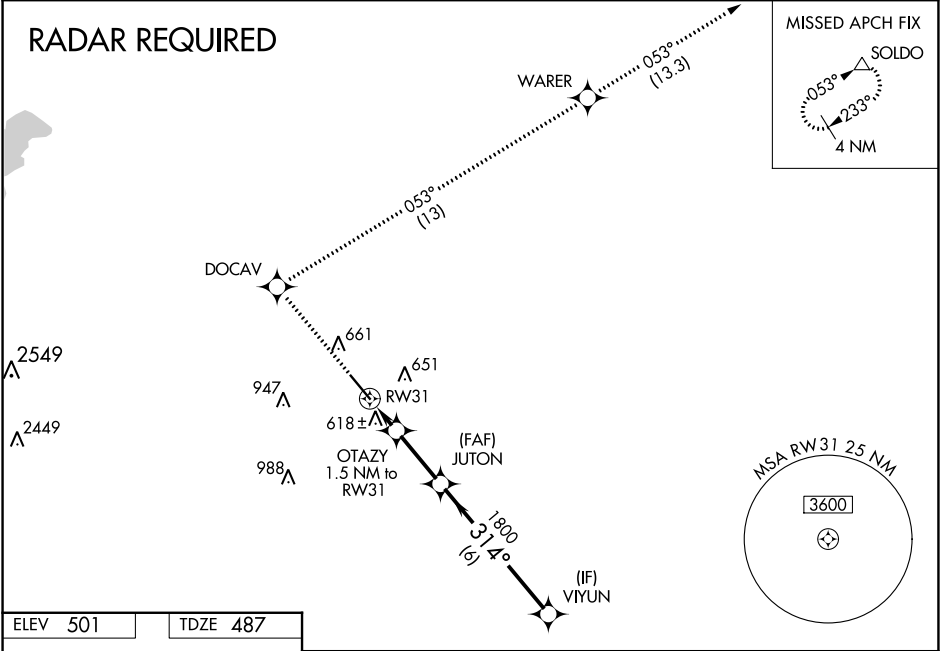

ELEV 501	TDZE 487
-----------------	-----------------

	2000 DOCAV	WARER	3000 SOLDO	VIYUN
	↑	↻ tr 053°	↑ tr 053°	△
* LNAV only	OTAZY 1.5 NM to RW31		JUTON 1800	2700
	RW31	*1000	1800	GP 3.00° TCH 50
	1.5 NM	2.5 NM	6 NM	
CATEGORY	A	B	C	D
LPV DA	687-¾		200 (200-¾)	
LNAV/VNAV DA	925-1½		438 (500-1½)	
LNAV MDA	880-1 393 (400-1)		880-1¼ 393 (400-1¼)	
CIRCLING	980-1 479 (500-1)	1020-1 519 (600-1)	1300-2¼ 799 (800-2¼)	1300-2½ 799 (800-2½)

SC-2, 22 FEB 2024 to 21 MAR 2024

SC-2, 22 FEB 2024 to 21 MAR 2024

MIRL Rwy 13-31 0