LOC/DME I-UAT	APP CRS	Rwy Idg	12000
111.9	164°	TDZE	4223
Chan 56		Apt Elev	4227

ILS or LOC RWY 16R
SALT LAKE CITY INTL (SLC)

DME or RADAR required.

Simultaneous approach authorized. For inop ALS, increase S-LOC 16R Cat C and D visibilities to RVR 5500.

ALSF-2

MISSED APPROACH: Climb to 4800 then climbing right turn to 8100 on heading 300° and on TCH VORTAC R-249 to STACO INT/TCH 20 DME and hold.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON	CLNC DEL	CPDLC
124.75 125.625	125.7 284.6	132.65 336.4	123.775 348.6	127.3 379.975	

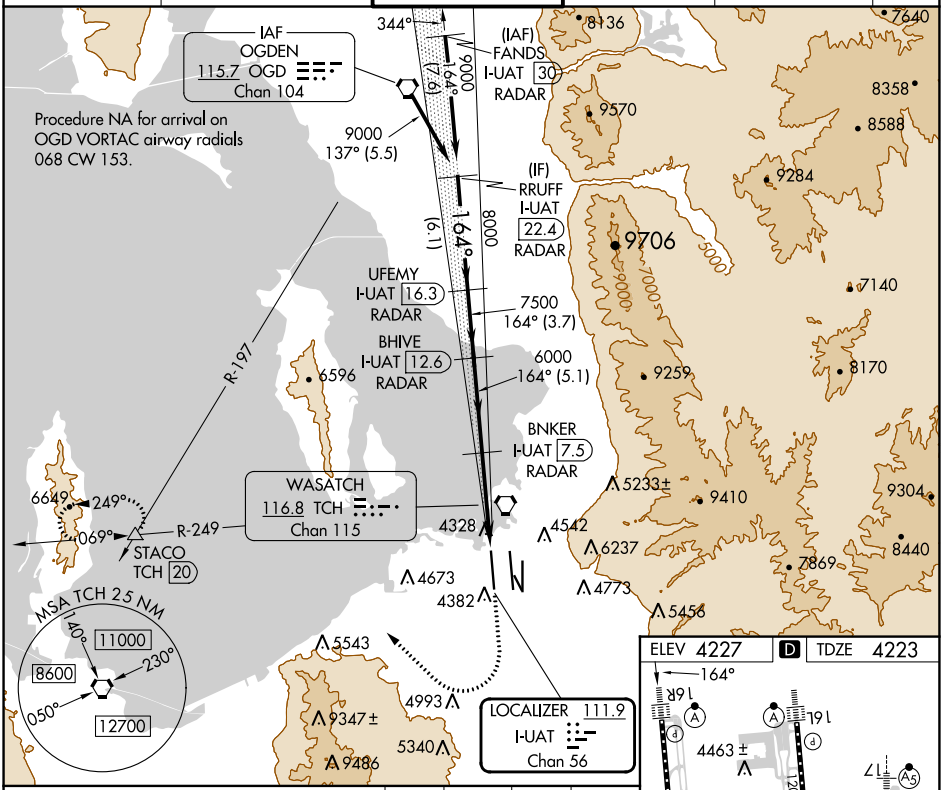

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).

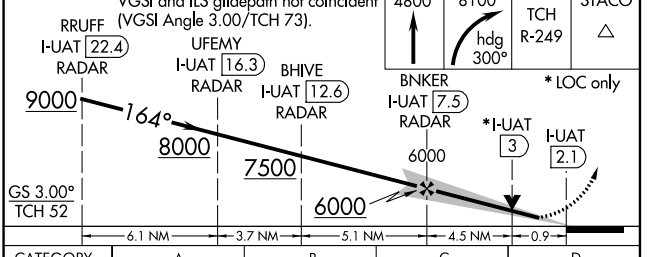

CATEGORY	A	B	C	D
S-ILS 16R	4423/18 200 (200-½)			
S-LOC 16R	4580/24 357 (400-½)		4580/30 357 (400-⅝)	4580/40 357 (400-¾)

ELEV 4227 D TDZE 4223

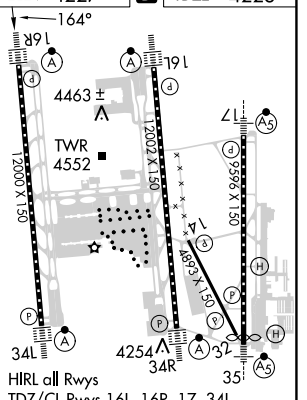

FAF to MAP 5.3 NM

Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

SW-4, 18 APR 2024 to 16 MAY 2024
SW-4, 18 APR 2024 to 16 MAY 2024