LOC/DME I-PXP	APP CRS	Rwy Idg	6018
110.7	281°	TDZE	799
Chan 44		Apt Elev	799

ILS or LOC RWY 28

CLEVELAND-HOPKINS INTL (CLE)

RNAV 1. From HARDR: RNAV 1-DME/DME/IRU or GPS required for procedure entry. Aircraft not DME/DME/IRU or GPS equipped - RADAR required for procedure entry.

DME required.

T Circling Rwy 10 NA at night. Inop table does not apply to S-ILS 28.

MALSF

MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 direct DJB VOR/DME and hold.

D-ATIS	CLEVELAND APP CON	CLEVELAND TOWER	GND CON	CLNC DEL	CPDLC
ARR 127.85 DEP 132.375	126.55 346.325	124.5 273.45	121.7 273.45	125.05 273.45	

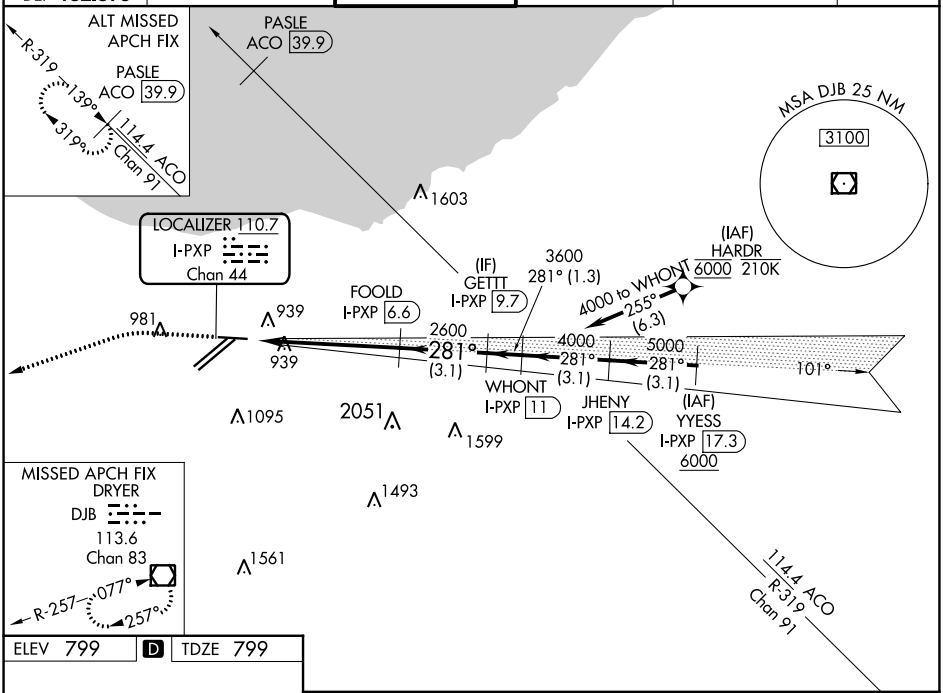

ELEV 799	D	TDZE 799



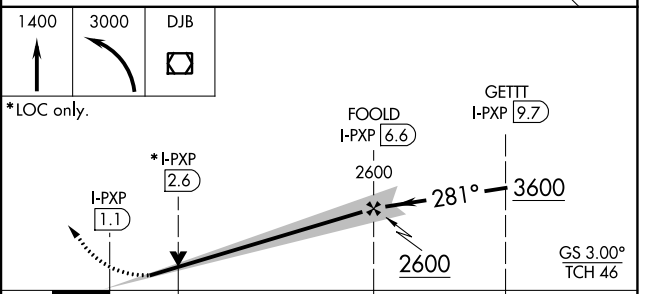

CATEGORY	A	B	C	D
S-ILS 28	999/40 200 (200-¾)			
S-LOC 28	1340/40 541 (600-¾)		1340-1⅜ 541 (600-1⅜)	
C CIRCLING	1420-1 621 (700-1)		1420-1¾ 621 (700-1¾)	1420-2 621 (700-2)

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L, and 24R
HIRL Rwys 6L-24R, 6R-24L and 10-28

EC-2, 16 MAY 2024 to 13 JUN 2024
EC-2, 16 MAY 2024 to 13 JUN 2024