RNAV (GPS) Y RWY 31L

SAN ANTONIO INTL (SAT)

WAAS CH 61209 W31A	APP CRS 308°	Rwy Idg 8502 TDZE 790 Apt Elev 809

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. Circling NA northwest of Rwys 4 and 13R.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 4200 direct HASDO and track 307° to REUBE and hold.

D-ATIS	SAN ANTONIO APP CON	SAN ANTONIO TOWER	GND CON	CLNC DEL	CPDLC
118.9	125.1 307.0	119.8 257.8	121.9 348.6	126.7	

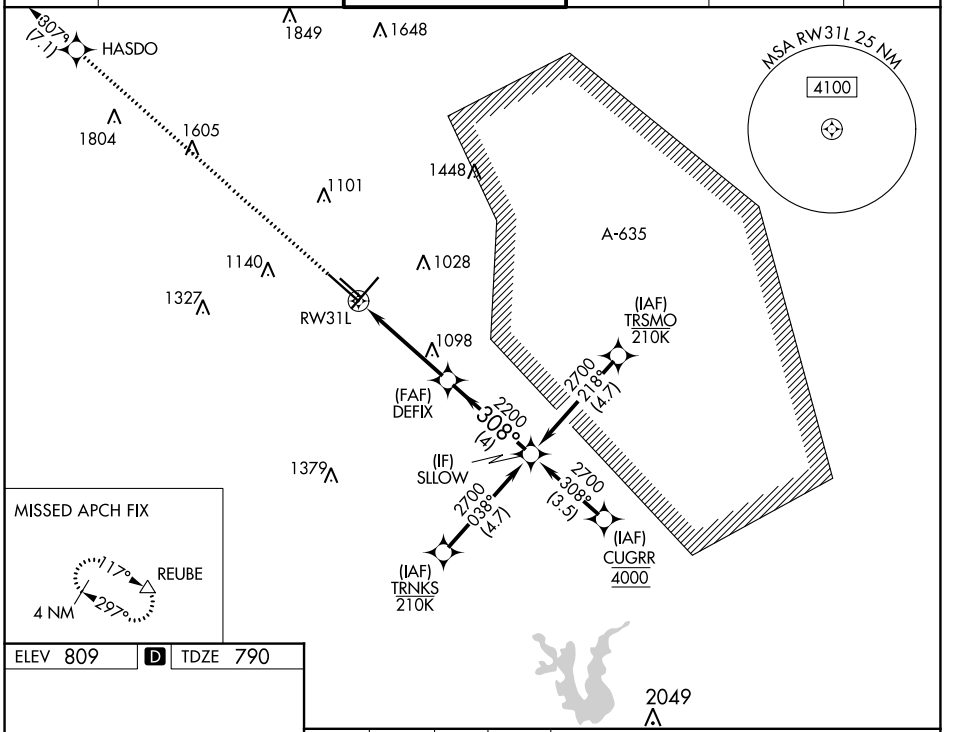

ELEV 809 | D | TDZE 790



TDZ/CL Rwy 13R
REIL Rwys 13L, 22 and 31R
HIRL Rwys 4-22 and 13R-31L
MIRL Rwy 13L-31R

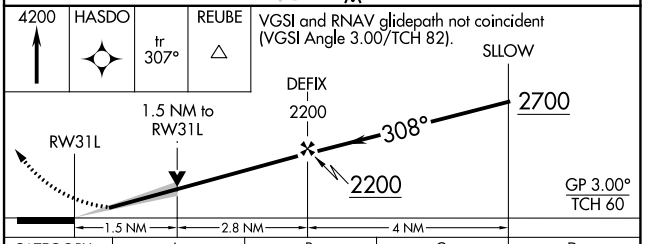

CATEGORY	A	B	C	D
LPV DA *	990/24 200 (200-½)			
LNAV/VNAV DA	1220/40 430 (500-¾)			
LNAV MDA	1360/24 570 (600-½)		1360/60 570 (600-1¼)	
C CIRCLING	1360-1 551 (600-1)		1420-1¾ 611 (700-1¾)	1520-2¼ 711 (800-2¼)

SC-3, 16 MAY 2024 to 13 JUN 2024
SC-3, 16 MAY 2024 to 13 JUN 2024