
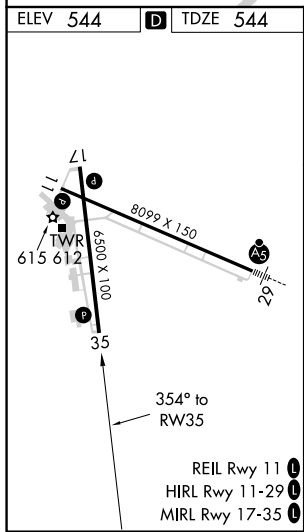


APP CRS	Rwy Idg	6500
354°	TDZE	544
	Apt Elev	544

RNAV (GPS) RWY 35

ST LOUIS RGNL (ALN)

RNP APCH.			MISSED APPROACH: Climb to 2200 direct JETIK and hold.		
<p>▼ Visibility reduction by helicopters NA. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDA 60 feet, increase LNAV Cat C/ D visibility 1/8 SM and Circling Cat C/D visibility 1/4 SM. When VGSi inop, straight-in/ Circling Rwy 35 procedure and Circling Rwy 17 NA at night.</p>					
ATIS	ST LOUIS APP CON	REGIONAL TOWER*	GND CON	CLNC DEL	UNICOM
128.0	124.2 353.9	126.0 (CTAF) 0 239.0	120.2	120.2 (when tower closed)	122.95

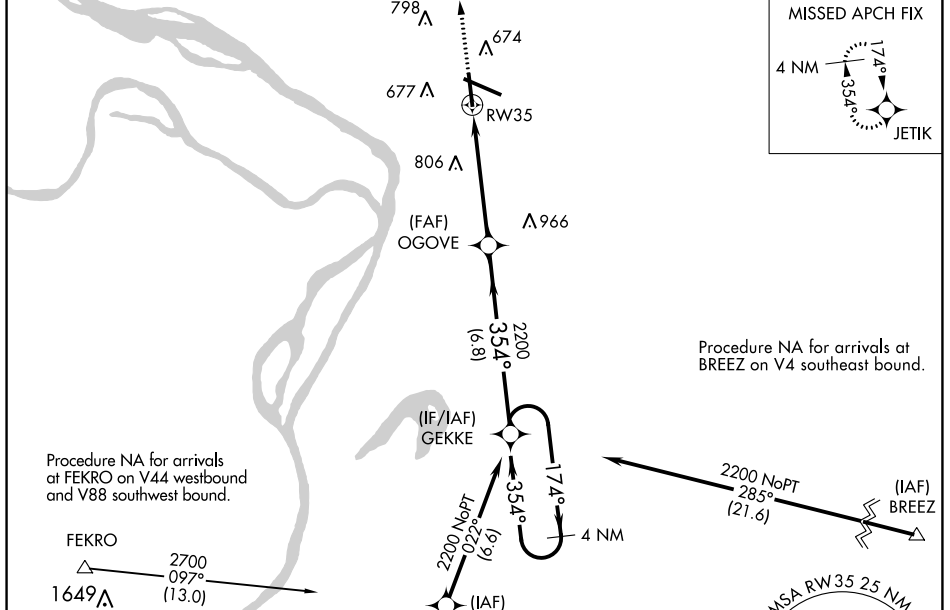

2200	JETIK	Visual Segment - Obstacles.	4 NM	
↑	✧		Holding Pattern	
	OGOVE	GEKKE		
	2200	2200	2200	
	5.1 NM	6.8 NM		
CATEGORY	A	B	C	D
LNAV MDA	1020-1	476 (500-1)	1020-1 3/8	476 (500-1 3/8)
CIRCLING	1020-1	476 (500-1)	1160-1 3/4	1200-2
			616 (700-1 3/4)	656 (600-2)

EC-3, 16 MAY 2024 to 13 JUN 2024

EC-3, 16 MAY 2024 to 13 JUN 2024