RNAV (GPS) RWY 4L

CHICAGO MIDWAY INTL (MDW)

WAAS CH 97741 W04B	APP CRS 047°	Rwy Idg 4749 TDZE 617 Apt Elev 620

RNP APCH.

Circling to Rwy 31R NA at night.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
Rwy 4L helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2400 direct YIGUT and hold.

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL	CPDLC
132.75	128.2 388.0	135.2 269.125	118.075	124.625	

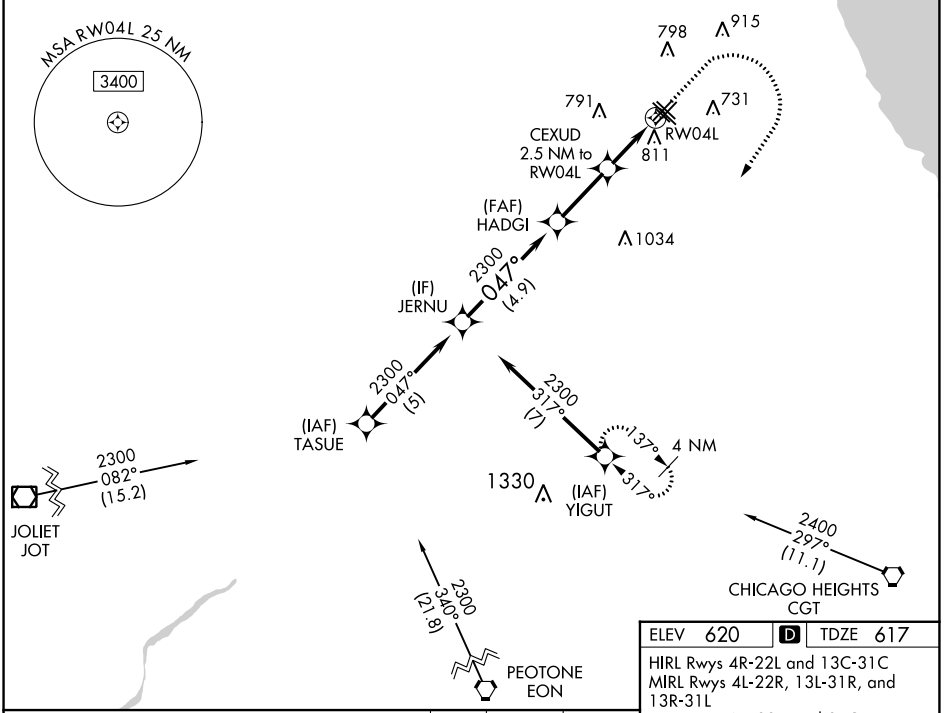

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 39).

1100 | 2400 | YIGUT

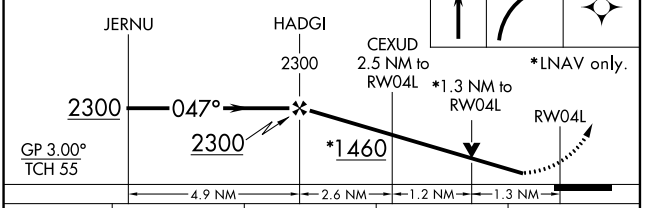

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	867-¾	250 (300-¾)		
LNAV/VNAV DA	1021-1⅛	404 (500-1⅛)		
LNAV MDA	1080-1	463 (500-1)	1080-1⅜	463 (500-1⅜)
C CIRCLING	1120-1	500 (500-1)	1340-2	1340-2¼
			720 (800-2)	720 (800-2¼)

ELEV 620 | D | TDZE 617

HIRL Rwys 4R-22L and 13C-31C
MIRL Rwys 4L-22R, 13L-31R, and 13R-31L
REIL Rwys 4R, 22L, and 31C
RLLS Rwys 13C and 31C



EC-3, 13 JUN 2024 to 11 JUL 2024
EC-3, 13 JUN 2024 to 11 JUL 2024