LOC I-PIA	APP CRS	Rwy Idg 10104
109.9	309°	TDZE 650
		Apt Elev 661

ILS or LOC RWY 31

GENERAL DOWNING-PEORIA INTL (PIA)

When local altimeter setting not received, use Lincoln altimeter setting and increase S-ILS 31 DA to 939 feet; increase all MDAs 100 feet; and Circling visibility Cat C/D ½ SM. For inop ALS, when using Lincoln altimeter setting increase ILS-31 all Cats visibility to RVR 4500.
* RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1200 then climbing left turn to 2400 direct PIA VORTAC and hold, continue climb-in-hold to 2400.

ATIS	SAINT LOUIS APP CON	PEORIA TOWER	GND CON
126.1 282.2	125.8 269.2	124.0 353.85	121.85 348.6

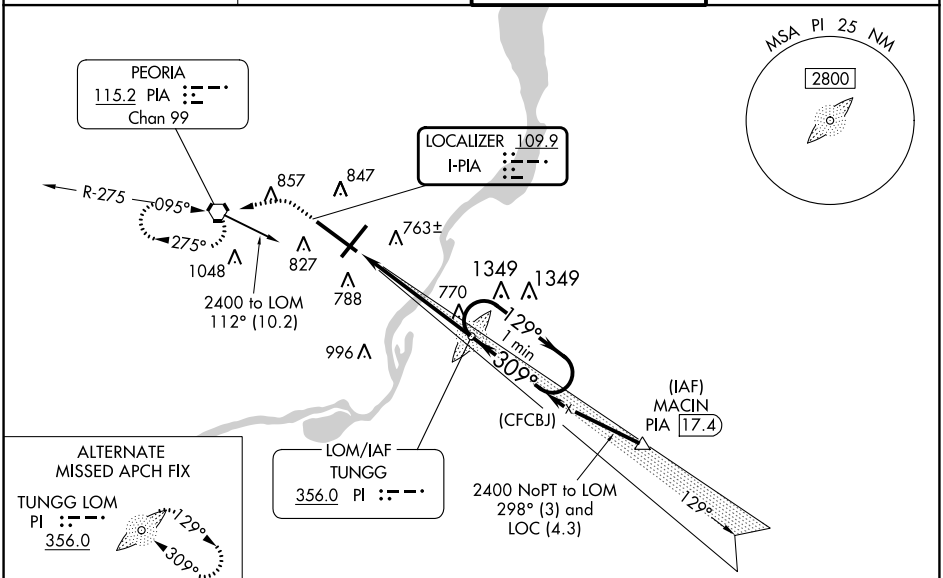

ELEV 661 D TDZE 650



HIRL Rwys 4-22 and 13-31

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

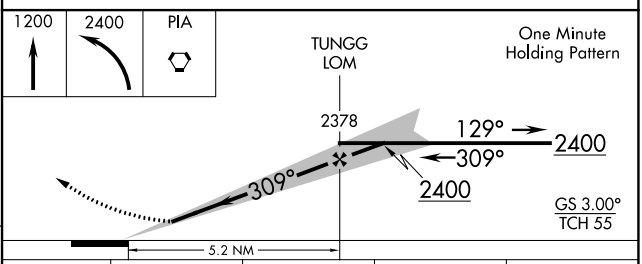

CATEGORY	A	B	C	D
S-ILS 31 *	850/24 200 (200-½)			
S-LOC 31	1200/24 550 (600-½)		1200/60	550 (600-1¼)
C CIRCLING	1200-1	539 (600-1)	1200-1⅝ 539 (600-1⅝)	1400-2¼ 739 (800-2¼)

EC-3, 13 JUN 2024 to 11 JUL 2024
EC-3, 13 JUN 2024 to 11 JUL 2024