WAAS CH 82518 W35A	APP CRS 354°	Rwy Idg 3898 / TDZE 822 / Apt Elev 825

RNAV (GPS) RWY 35

HUTSON FLD (GAF)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C . When local altimeter setting not received, use Grand Forks Intl altimeter setting: increase LPV DA to 1141 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1268 feet and all visibilities ¼ SM; increase all MDA's 80 feet and visibility circling Cat C ¼ SM. Baro-VNAV NA when using Grand Forks Intl altimeter setting. Circling NA to Rwys 8 and 26.

NA

MISSED APPROACH: Climb to 4000 direct OHUTO and hold, continue climb-in-hold to 4000.

AWOS-3	GRAND FORKS APP CON ★	UNICOM
118.625	118.1 318.1	122.8 (CTAF) L

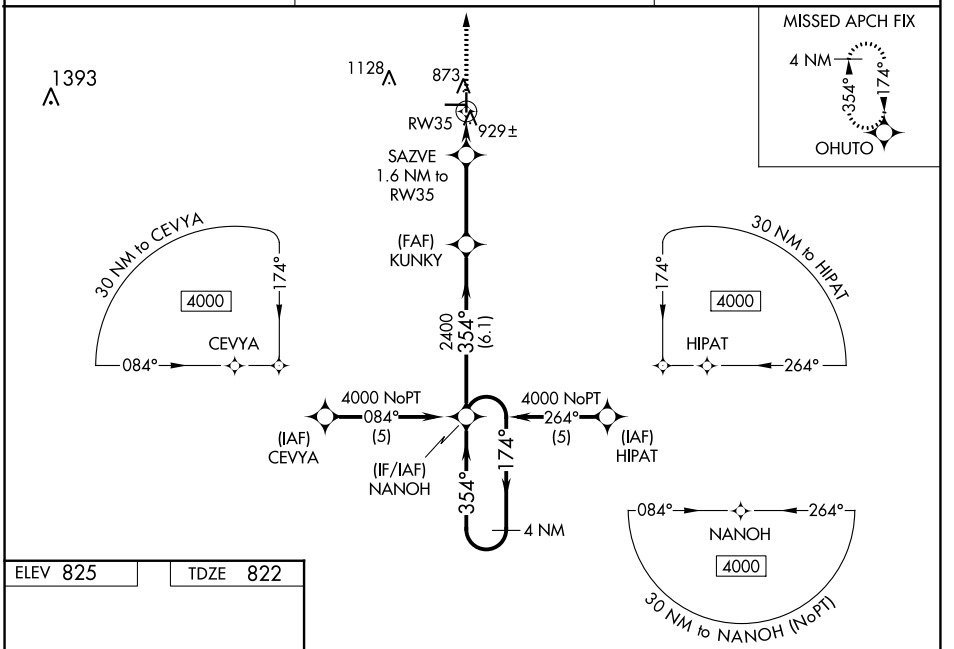

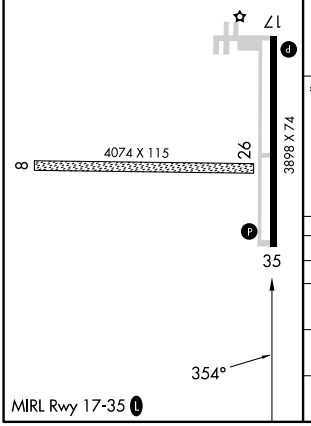

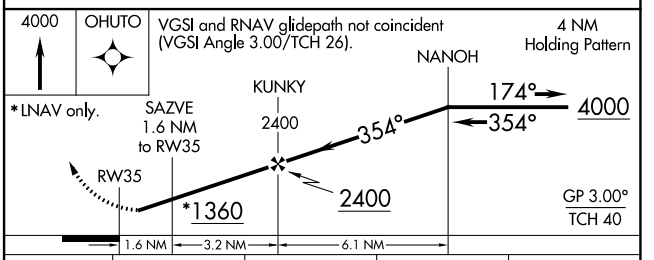

CATEGORY	A	B	C	D
LPV DA	1072-1	250 (300-1)		NA
LNAV/VNAV DA	1199-1¼	377 (400-1¼)		NA
LNAV MDA	1180-1	358 (400-1)		NA
CIRCLING	1340-1	515 (600-1)	1440-1¾ 615 (700-1¾)	NA

NC-1, 13 JUN 2024 to 11 JUL 2024
NC-1, 13 JUN 2024 to 11 JUL 2024