

VOR/DME PNT 109.6 Chan 33	APP CRS 217°	Rwy Idg 5000 TDZE 666 Apt Elev 666
---	------------------------	---


VOR RWY 24

PONTIAC MUNI (PNT)


When local altimeter setting not received, use Bloomington/Normal altimeter setting and increase all MDAs 100 feet; increase S-24 and Circling Cat C visibility ½ SM, and increase JUDUS fix minimums S-24 Cat C visibility ¼ SM and Circling Cat C ½ SM.

MISSED APPROACH: Climb to 3000 direct PNT VOR/DME and hold.

AWOS-3 119.675	CHICAGO CENTER 123.75 259.1	UNICOM 123.075 (CTAF) 0
--------------------------	---------------------------------------	-----------------------------------

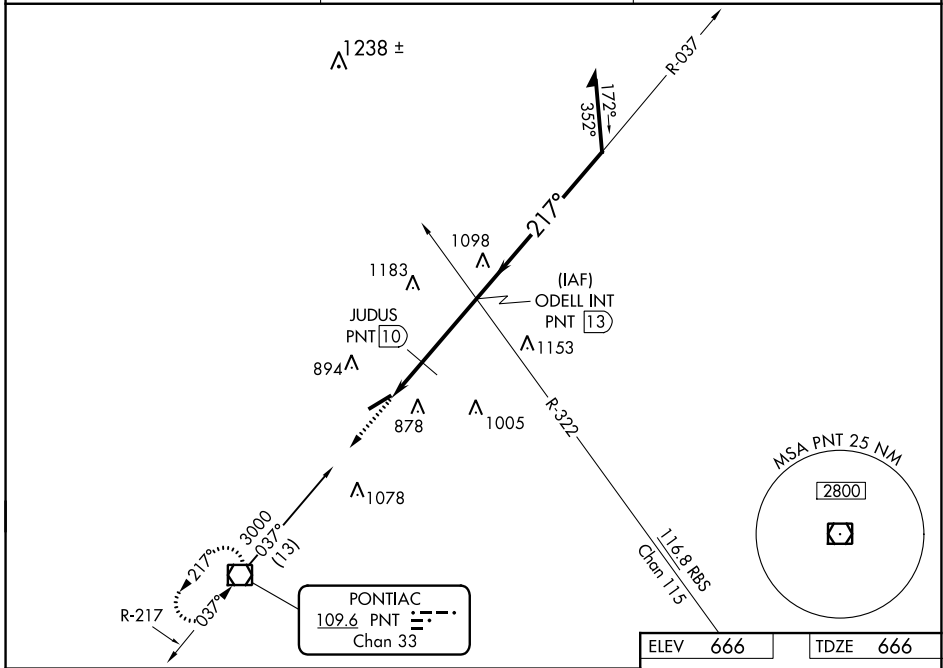


3000 PNT 109.6 *1340 when using Bloomington/Normal altimeter setting. ODELL INT PNT 13 Remain within 10 NM

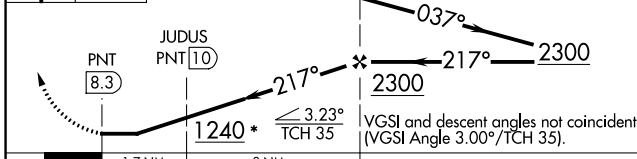

CATEGORY	A	B	C	D
S-24	1240-1	574 (600-1)	1240-1½ 574 (600-1½)	NA
CIRCLING	1240-1	574 (600-1)	1320-1¾ 654 (700-1¾)	NA
JUDUS FIX MINIMUMS				
S-24	1140-1	474 (500-1)	1140-1¼ 474 (500-1¼)	NA
CIRCLING	1180-1 514 (600-1)	1200-1 534 (600-1)	1320-1¾ 654 (700-1¾)	NA

ELEV 666	TDZE 666
----------	----------

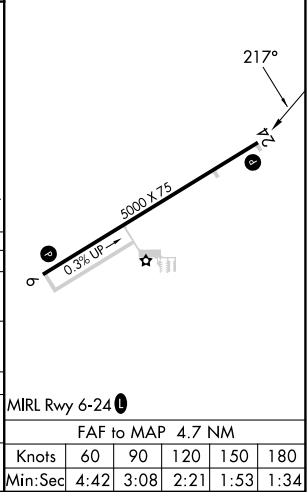

MIRL Rwy 6-24 0	FAF to MAP 4.7 NM				
Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34