



WAAS CH <b>78226</b> <b>W32A</b>	APP CRS <b>324°</b>	Rwy Idg TDZE <b>3268</b> Apt Elev <b>3295</b>	<b>5452</b> <b>3268</b> <b>3295</b>
--	------------------------	---	---

# RNAV (GPS) RWY 32L



CAVERN CITY AIR TRML (CNM)

<b>⚠</b> DME/DME RNP-0.3 NA. When local altimeter setting not received, use Artesia Muni altimeter setting and increase all MDA 120 ft. Increase LP Cats C/D visibility to 1 $\frac{1}{2}$ mile, LNAV Cats C/D to 1 $\frac{3}{4}$ mile and Circling Cat C to 2 $\frac{1}{4}$ mile. VDP NA when using Artesia Muni altimeter setting.	<b>MISSED APPROACH:</b> Climb to 6000 direct BICNA and hold.
--	--

<b>ASOS</b> <b>118.375</b>	<b>ALBUQUERQUE CENTER</b> <b>135.875 292.15</b>	<b>UNICOM</b> <b>123.0 (CTAF) 0</b>
-------------------------------	--	--

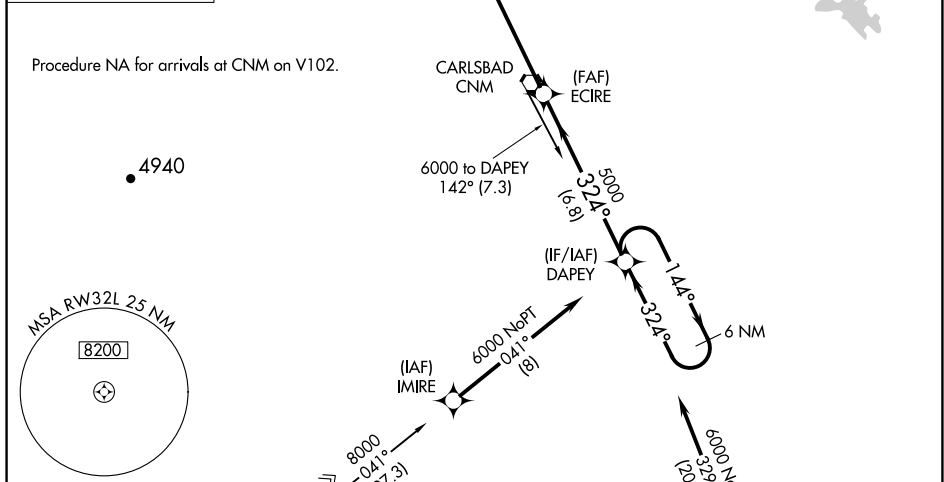

ELEV 3295	<b>D</b>	TDZE 3268
MIRL Rwy 3-21, 8-26 and 14R-32L 0		

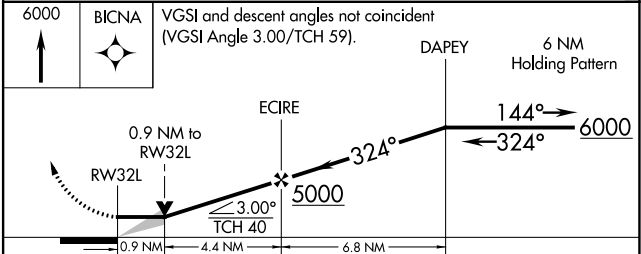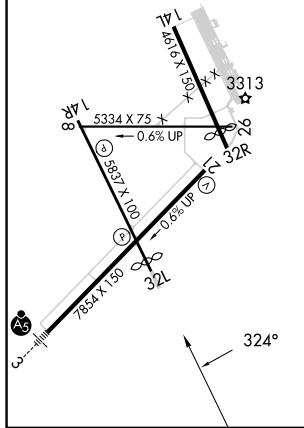

CATEGORY	A	B	C	D
LP MDA	3720-1	452 (500-1)	3720-1 $\frac{3}{8}$	452 (500-1 $\frac{3}{8}$ )
LNAV MDA	3740-1	472 (500-1)	3740-1 $\frac{3}{8}$	472 (500-1 $\frac{3}{8}$ )
<b>C</b> CIRCLING	3740-1 445 (500-1)	3780-1 485 (500-1)	3960-1 $\frac{3}{4}$ 665 (700-1 $\frac{3}{4}$ )	4260-3 965 (1000-3)