RNAV (GPS) RWY 15

ROBERT GRAY AAF (GRK)

WAAS	APP CRS	Rwy Idg	9997
CH 78099	153°	TDZE	1015
W15A		Apt Elev	1015

RNP APCH - GPS.

ASR/PAR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA west of Rwy 15-33.
For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1⅜ SM and LNAV Cats C/D/E visibility to 1⅜ SM.
RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct AGJ VORTAC and hold.

ATIS	GRAY APP CON	GRAY TOWER	GND CON	CLNC DEL
124.9	120.075 323.15	120.75 (CTAF) 285.5	121.8 279.5	126.2 251.1

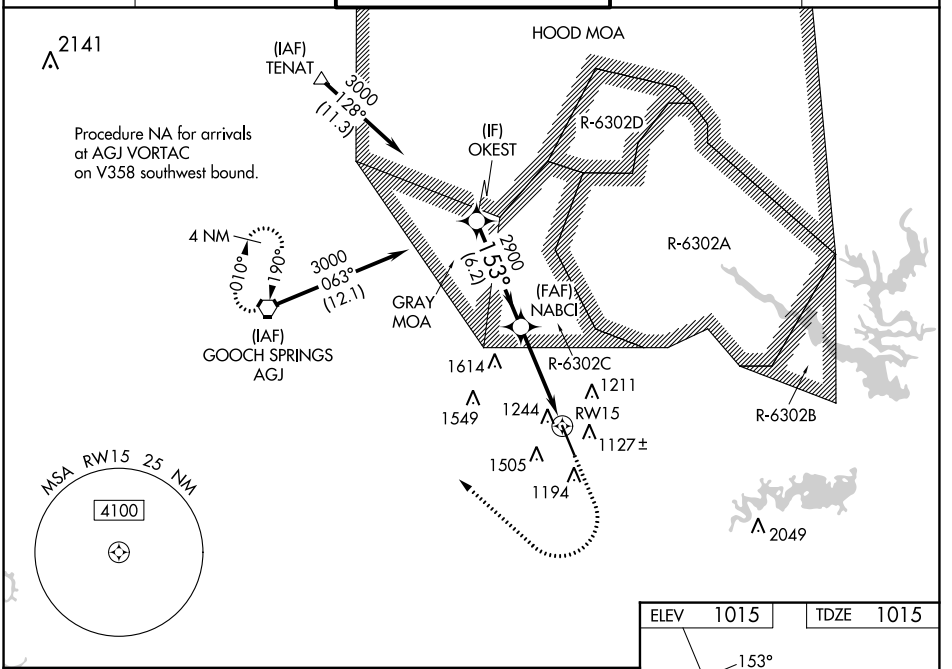

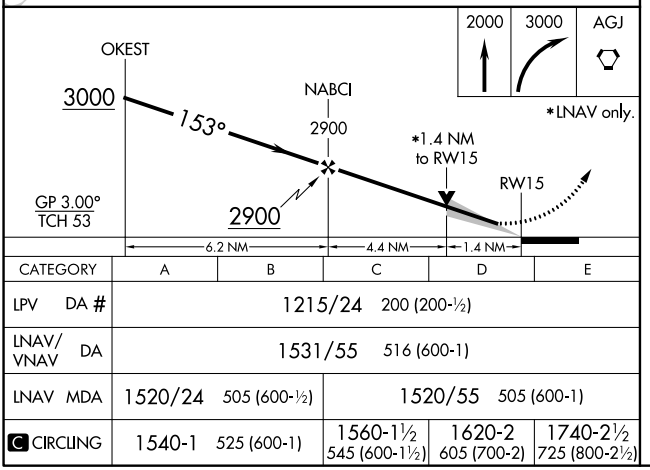

CATEGORY	A	B	C	D	E
LPV DA #	1215/24 200 (200-½)				
LNAV/VNAV DA	1531/55 516 (600-1)				
LNAV MDA	1520/24 505 (600-½)		1520/55 505 (600-1)		
C CIRCLING	1540-1 525 (600-1)		1560-1½ 545 (600-1½)	1620-2 605 (700-2)	1740-2½ 725 (800-2½)

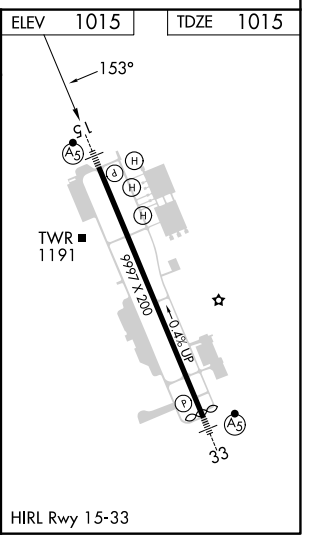

SC-3, 11 JUL 2024 to 08 AUG 2024
SC-3, 11 JUL 2024 to 08 AUG 2024