

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>70614</b><br><b>W17A</b> | APP CRS<br><b>172°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5502</b><br><b>2176</b><br><b>2189</b> |
|--|------------------------|-----------------------------|---|

# RNAV (GPS) RWY 17

WEST WOODWARD (WWR)


RNP APCH

**⚠** Baro-VNAV and VDP NA when using Gage altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Gage altimeter setting and increase all DA/MDA 40 feet. Inop table does not apply. Circling Rwy 5, 23 NA at night.



ODALS

MISSED APPROACH:  
Climb to 4500 direct  
TISSY and hold.

|                          |   |                               |
|--------------------------|---|-------------------------------|
| AWOS-3<br><b>118.425</b> | KANSAS CITY CENTER<br><b>126.95 379.2</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|--------------------------|---|-------------------------------|

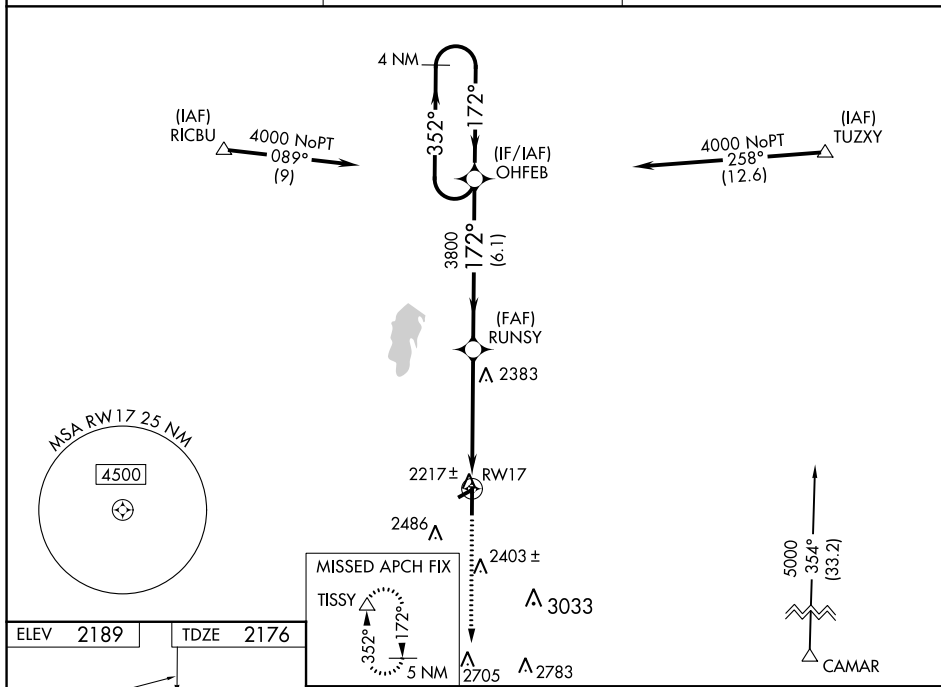

|           |           |
|-----------|-----------|
| ELEV 2189 | TDZE 2176 |
|-----------|-----------|

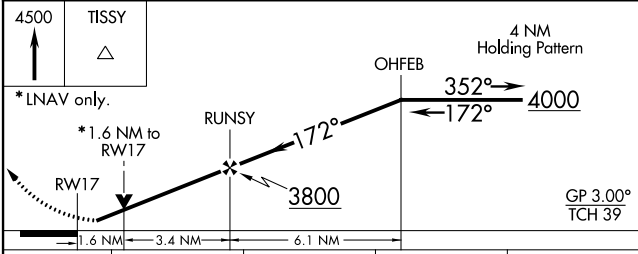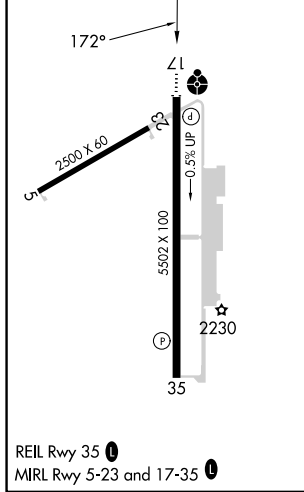

| CATEGORY     | A                     | B                     | C                       | D                       |
|--------------|-----------------------|-----------------------|-------------------------|-------------------------|
| LPV DA       | 2426-1 250 (300-1)    |                       |                         |                         |
| LNAV/VNAV DA | 2572-1½ 396 (400-1½)  |                       |                         |                         |
| LNAV MDA     | 2700-1                | 524 (600-1)           | 2700-1½<br>524 (600-1½) | 2700-1¾<br>524 (600-1¾) |
| CIRCLING     | 2700-1<br>511 (600-1) | 2860-1<br>671 (700-1) | 2940-2¼<br>751 (800-2¼) | 2960-2½<br>771 (800-2½) |

SC-1, 11 JUL 2024 to 08 AUG 2024

SC-1, 11 JUL 2024 to 08 AUG 2024