ILS or LOC RWY 11

COLUMBIA METRO (CAE)

LOC/DME I-CAE	APP CRS	Rwy Idg	8601
110.3	112°	TDZE	236
Chan 40		Apt Elev	236

DME or RADAR required for LOC only.

For inop ALS, increase S-ILS 11 Cat E visibility to RVR 4000, S-LOC 11 Cats C/D/E visibility to 1⅞ SM, and BEHRN Minimums S-LOC 11 Cat E visibility to 1⅜ SM.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 2300 direct CAE VORTAC and hold, continue climb-in-hold to 2300. (TACAN aircraft contine on CAE VORTAC R-140 to ADCOM INT/CAE VORTAC 10 DME and hold NW, right turn, 140° inbound)

ATIS	COLUMBIA APP CON	COLUMBIA TOWER	GND CON	CLNC DEL
120.15	133.4 285.6 (290°-109°) 124.15 338.2 (110°-289°)	119.5 257.8	121.9 348.6	119.75

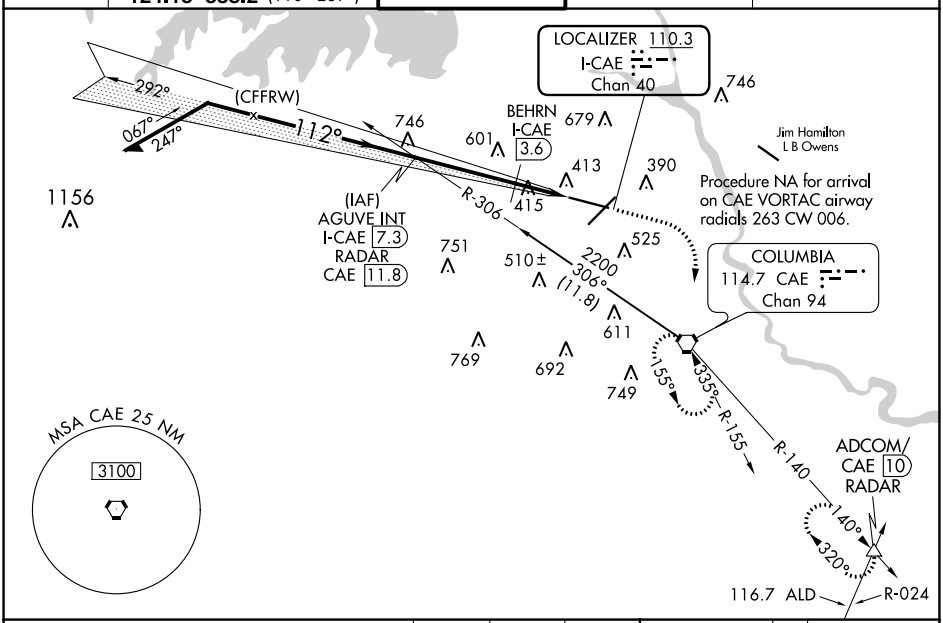

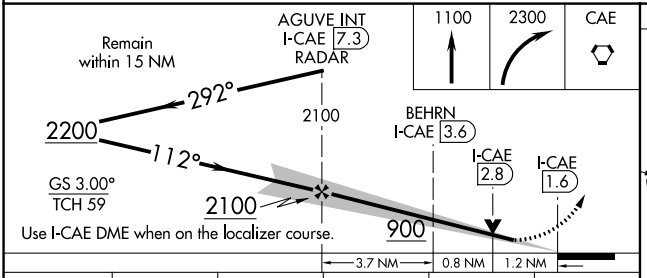

CATEGORY	A	B	C	D	E
S-ILS 11	436/18 200 (200-½)				
S-LOC 11	900/24 664 (700-½)		900-1½ 664 (700-1½)		
C CIRCLING	900-1 664 (700-1)		1040-2¼ 804 (900-2¼)	1040-2½ 804 (900-2½)	1040-2¾ 804 (900-2¾)
BEHRN MINIMUMS (DME REQUIRED)					
S-LOC 11	680/24 444 (500-½)		680/45 444 (500-⅞)		
C CIRCLING	740-1 504 (600-1)	860-1 624 (700-1)	1040-2¼ 804 (900-2¼)	1040-2½ 804 (900-2½)	1040-2¾ 804 (900-2¾)

ELEV 236 D TDZE 236



REIL Rwy 23
TDZ/CL Rwy 11
HIRL Rwys 5-23 and 11-29

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

SE-2, 08 AUG 2024 to 05 SEP 2024
SE-2, 08 AUG 2024 to 05 SEP 2024