

WAAS CH 49137 W10A	APP CRS 096°	Rwy Idg TDZE Apt Elev	3463 1013 1048
---------------------------------	------------------------	-----------------------------	---


RNAV (GPS) RWY 10

GREENVILLE DOWNTOWN (GMU)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Green altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility 1/8 mile and Circling Cat C visibility 1/4 mile.

MISSED APPROACH: Climb to 3700 direct JADOT and hold.

ATIS ★ 127.075	GREER APP CON ★ 118.8 270.275	GREENVILLE TOWER ★ 119.9 (CTAF) 0 257.7	GND CON 121.25	UNICOM 122.95
--------------------------	---	---	--------------------------	-------------------------

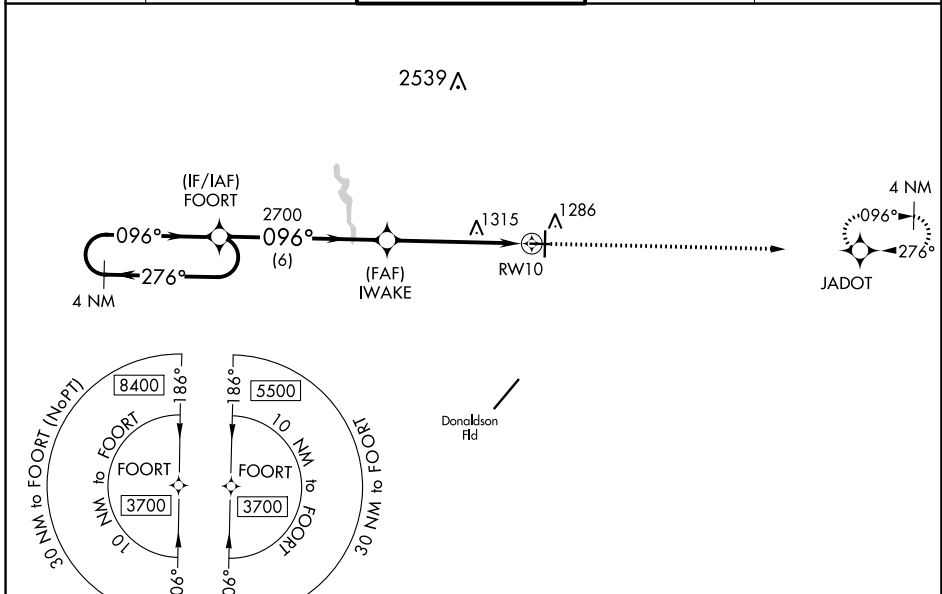

SE-2, 05 SEP 2024 to 03 OCT 2024

SE-2, 05 SEP 2024 to 03 OCT 2024

4 NM Holding Pattern		FOORT		3700	JADOT
GP 3.00° TCH 60		IWAKE		2700	RWY 10
← 276°		→ 096°		↘ 096°	
6 NM		5.2 NM			
CATEGORY	A	B	C	D	
LPV DA	1269-1		256 (300-1)		
LNAV/VNAV DA	1351-1½		338 (400-1½)		
LNAV MDA	1580-1 567 (600-1)		1580-1½ 567 (600-1½)		
C CIRCLING	1620-1 572 (600-1)		1780-2 732 (800-2) 1860-2¾ 812 (900-2¾)		

ELEV 1048	D	TDZE 1013
-----------	----------	-----------

Diagram details: RWY 10 (4000 X 80) with 0.5% UP slope. RWY 28 (5393 X 100) with 1.1% UP slope. RWY 61. TWR 1094. REIL Rwy 28, REIL Rwy 19, MIRL Rwy 10-28, HIRL Rwy 1-19.