


| | | | |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 40015 W28A | APP CRS 277° | Rwy Idg TDZE Apt Elev | 9351 50 50 |
|--|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) Z RWY 28


SAVANNAH/HILTON HEAD INTL (SAV)

| | | | | | |
|---|--|---|--|--|--|
| RNP APCH. | | MISSED APPROACH: Climb to 2600 direct TILEE and hold. | | | |
| <p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).</p> | | | | | |


| | | | | | |
|-----------------------|---|--|-------------------------------|-----------------------------------|-------------------------|
| ATIS 123.75 | SAVANNAH APP CON* 125.3 371.875 | SAVANNAH TOWER* 125.975 (CTAF) 257.8 | GND CON 121.9 348.6 | CLNC DEL 119.55 291.775 | UNICOM 122.95 |
|-----------------------|---|--|-------------------------------|-----------------------------------|-------------------------|

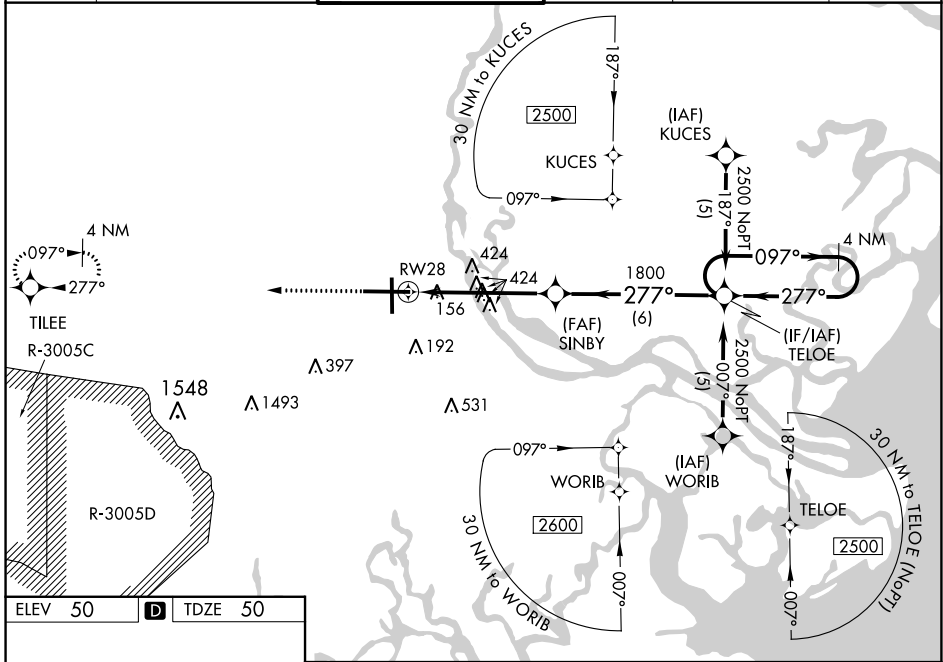

| | | |
|---------|----------|---------|
| ELEV 50 | D | TDZE 50 |
|---------|----------|---------|



TDZ/CL Rwy 10
REIL Rws 19 and 28 **L**
HIRL Rws 1-19 and 10-28 **L**

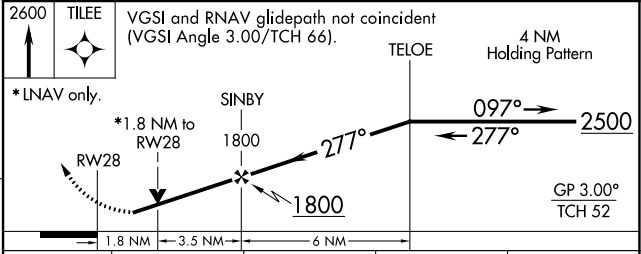

| CATEGORY | A | B | C | D |
|-------------------|--------|-------------|----------------------|------------------------|
| LPV DA | 307-1 | | 257 (300-1) | |
| LNAV/VNAV DA | 431-1¼ | | 381 (400-1¼) | |
| LNAV MDA | 680-1 | 630 (700-1) | 680-1¾ | 630 (700-1¾) |
| C CIRCLING | 680-1 | 630 (700-1) | 740-2 690 (700-2) | 740-2¼ 690 (700-2¼) |

SE-4, 05 SEP 2024 to 03 OCT 2024

SE-4, 05 SEP 2024 to 03 OCT 2024