

APP CRS	Rwy Idg	8400
224°	TDZE	12
	Apt Elev	13

RNAV (RNP) Z RWY 22L

JOHN F KENNEDY INTL (JFK)

RF required. RNP AR APCH.


▼ For uncompensated Baro-VNAV systems, procedure NA below -12°C (11°F) or above 54°C (130°F). Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 5500, increase RNP 0.30 all Cats visibility to RVR 6000.

ALSF-2




MISSED APPROACH: Climb to 3000 on track 224° to WEPLA and on track 177° to CHANT and hold.


D-ATIS	NEW YORK APP CON	KENNEDY TOWER		GND CON	CLNC DEL	CPDLC
(ARR/DEP) (ARR-NE) (ARR-SW)	128.125 117.7 115.4	Rwys 4R/22L and 13L/31R	119.1 281.55	121.9	135.05	
		Rwys 4L/22R and 13R/31L	123.9 281.55	348.6	348.6	

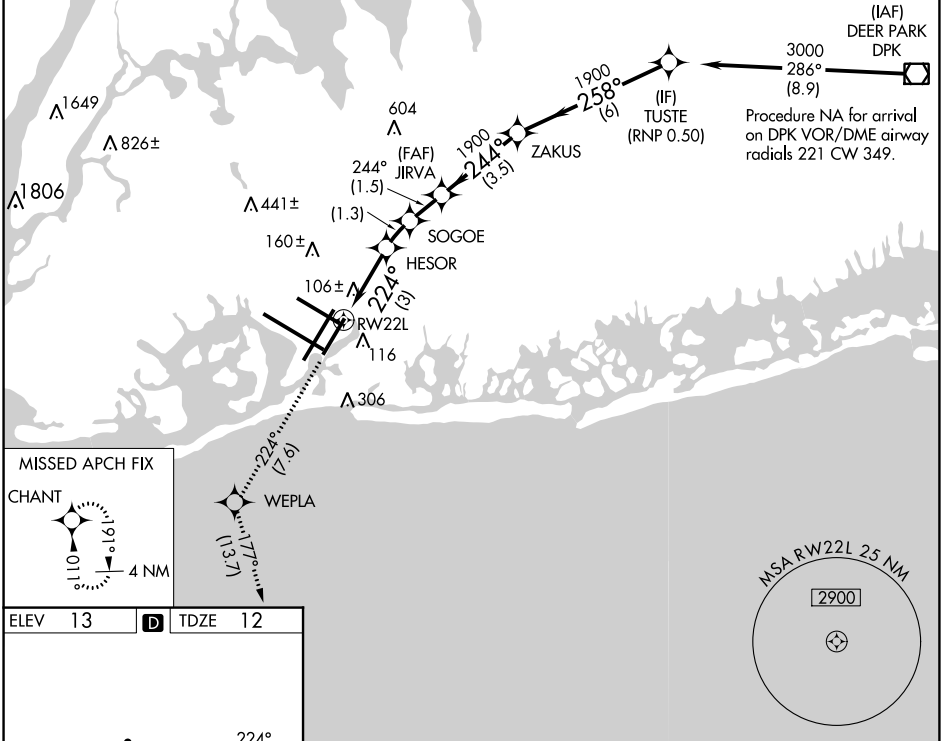

ELEV	13	D	TDZE	12
------	-----------	---	------	-----------



3000 ft 224° WEPLA 177° CHANT
 VGSIs and RNAV glidepath not coincident (VGSIs Angle 3.00/TCH 66).

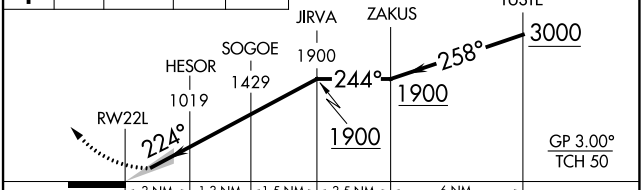

CATEGORY	A	B	C	D
RNP 0.20 DA		361/40	349 (400-¾)	
RNP 0.30 DA		421/40	409 (500-¾)	

RLS Rwys 13L and 13R
 HIRL all Rwys
 TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R

AUTHORIZATION REQUIRED

NE-2, 05 SEP 2024 to 03 OCT 2024

NE-2, 05 SEP 2024 to 03 OCT 2024