

RNAV (GPS) X RWY 22L

JOHN F KENNEDY INTL (JFK)

APP CRS 234°	Rwy Idg TDZE Apt Elev	8400 12 13
------------------------	-----------------------------	---------------------------------------




RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.4°C or above 5.4°C.
For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climbing left turn to 3000 direct CHANT and hold.

D-ATIS (ARR/DEP) (ARR-NE) (ARR-SW)	NEW YORK APP CON	KENNEDY TOWER Rwys 4R/22L and 13L/31R Rwys 4L/22R and 13R/31L	GND CON	CLNC DEL	CPDLC
128.725 117.7 115.4	128.125 269.0	119.1 281.55 123.9 281.55	121.9 348.6	135.05 348.6	

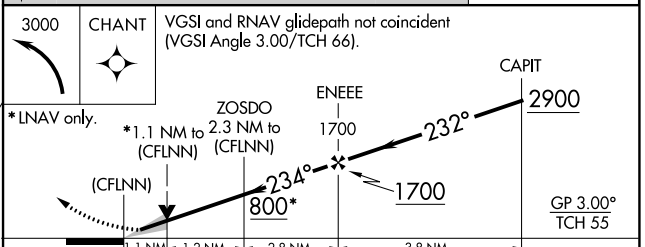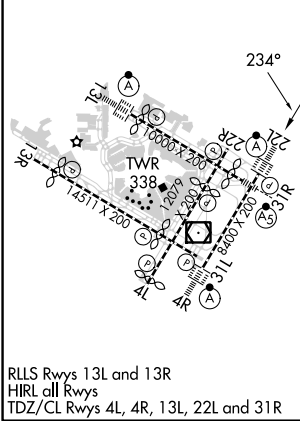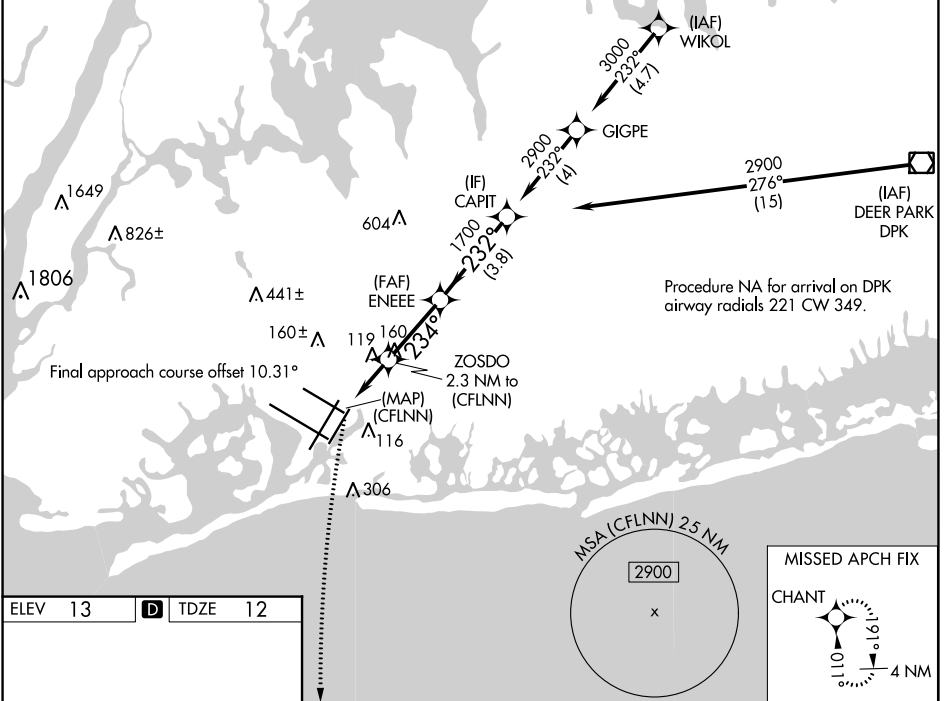

CATEGORY	A	B	C	D
LNAV/VNAV DA	413/40		401 (400-3/4)	
LNAV MDA	440/24	428 (500-1/2)	440/40	428 (500-3/4)
<input checked="" type="checkbox"/> CIRCLING	640-1	627 (700-1)	680-1 3/4 667 (700-1 3/4)	680-2 667 (700-2)

NE-2, 05 SEP 2024 to 03 OCT 2024

NE-2, 05 SEP 2024 to 03 OCT 2024