


WAAS CH 81819	APP CRS 044°	Rwy Idg 8400 TDZE 12 Apt Elev 13
-------------------------	------------------------	---

RNAV (GPS) Y RWY 4R

JOHN F KENNEDY INTL (JFK)

RNP APCH.	<p>Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cat C/D visibility to 1½ SM.</p>	<p>ALSF-2</p>	<p>MISSED APPROACH: (Do not exceed 210K until GAALO) Climb to 4000 direct GAALO and on track 083° to HIRBO and hold.</p>
-----------	---	---------------	--

D-ATIS (ARR/DEP) (ARR-NE) (ARR-SW) 128.725 117.7 115.4	NEW YORK APP CON 128.125 269.0	KENNEDY TOWER Rwys 4R/22L and 13L/31R 119.1 281.55 Rwys 4L/22R and 13R/31L 123.9 281.55	GND CON 121.9 348.6	CLNC DEL 135.05 348.6	CPDLC
---	--	---	-------------------------------	---------------------------------	-------

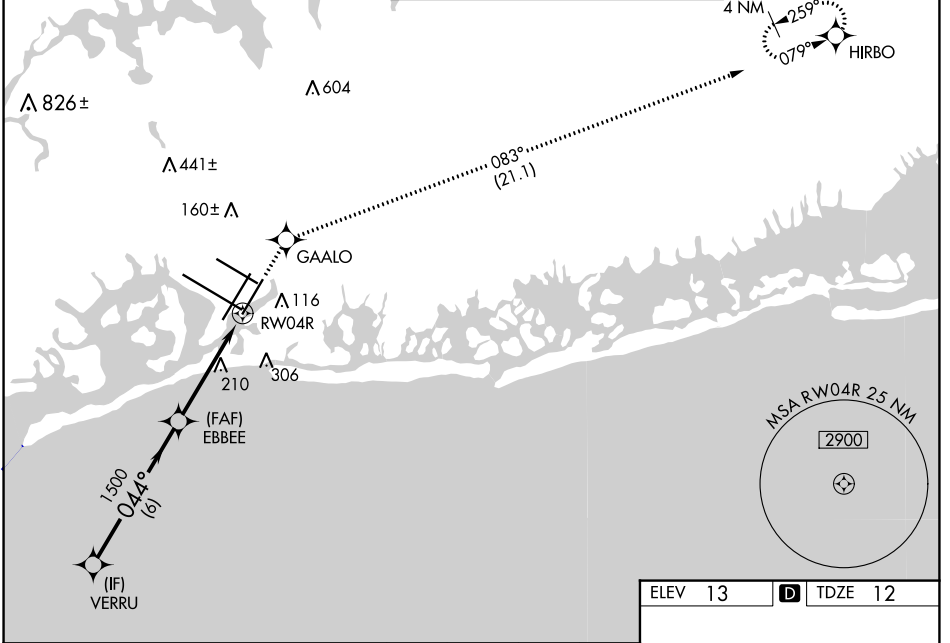

NE-2, 05 SEP 2024 to 03 OCT 2024

NE-2, 05 SEP 2024 to 03 OCT 2024

<p>VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).</p>		4000	GAALO	HIRBO
<p>VERRU</p>		↑	✧	✧
<p>GP 3.00° TCH 53</p>			tr	083°
<p>2000</p>				
<p>044°</p>				
<p>1500</p>				
<p>6 NM</p>				
<p>3.1 NM</p>				
<p>1.4 NM</p>				
<p>EBBEE</p>				
<p>*LNAV only</p>				
<p>1.4 NM to RWY 4R</p>				
<p>RWY 4R</p>				
CATEGORY	A	B	C	D
LPV DA		212/18	200 (200-½)	
LNAV/VNAV DA		369/40	357 (400-¾)	
LNAV MDA	520/24	508 (600-½)	520/55	508 (600-1)
CIRCLING	640-1	627 (700-1)	680-1¾ 667 (700-1¾)	680-2 667 (700-2)

