

APP CRS	Rwy Idg	7002
107°	TDZE	413
	Apt Elev	413

RNAV (GPS) RWY 12R

ST LOUIS DOWNTOWN (CPS)


RNP APCH - GPS

▼ When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 80 feet; increase LNAV Cats B/C/D and Circling Cat C visibility $\frac{1}{4}$ SM. Circling Rwy 5 NA at night. Rwy 12R helicopter visibility reduction below $\frac{1}{4}$ SM NA.

▲

MISSED APPROACH: Climb to 2200 direct JIXAB and right turn on 125° track to LICKO and hold.


ATIS 121.45	ST LOUIS APP CON 123.7 371.875	DOWNTOWN TOWER * 119.925 (CTAF) 0 379.3	GND CON 121.8	CLNC DEL 118.275	CLNC DEL 121.8 (When twr closed)	UNICOM 122.95
-----------------------	--	--	-------------------------	----------------------------	---	-------------------------

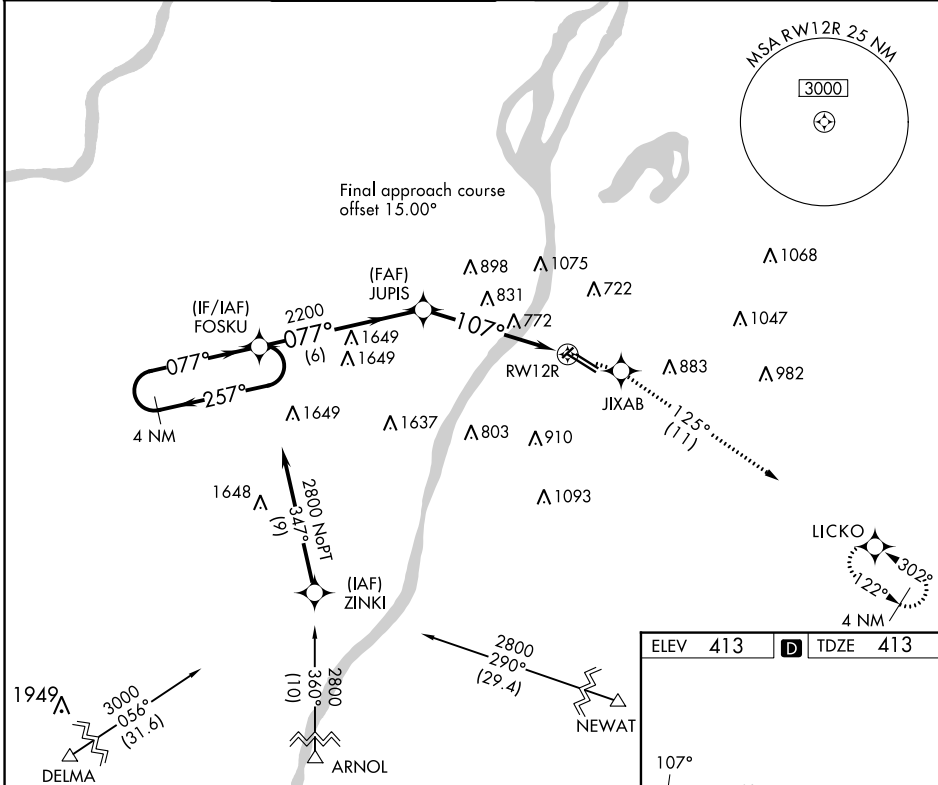

EC-3, 05 SEP 2024 to 03 OCT 2024

EC-3, 05 SEP 2024 to 03 OCT 2024

ELEV	413	D	TDZE	413
------	------------	----------	------	------------

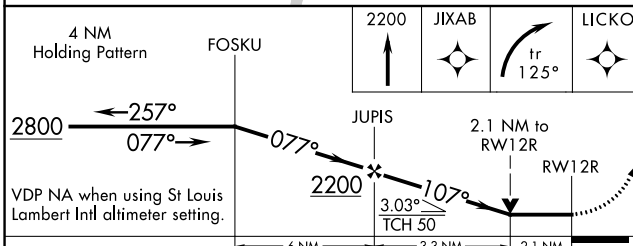

CATEGORY	A	B	C	D
LNAV MDA	1140-1 727 (800-1)		1140-2 727 (800-2)	1140-2 1/4 727 (800-2 1/4)
CIRCLING	1140-1 727 (800-1)		1240-2 1/2 827 (900-2 1/2)	1380-3 967 (1000-3)

