

APP CRS	Rwy Idg	9001
154°	TDZE	43
	Apt Elev	46

RNAV (RNP) Z RWY 15




CHARLESTON AFB/INTL (CHS)

⚠ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). GPS required. For inop ALSF, increase RNP 0.11 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.




MISSED APPROACH: Climb to 3000 on track 154° to SHRMP and hold.


D-ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL	CPDLC
124.75	120.7 306.925	126.0 239.0	121.9 348.6	127.325 291.65	

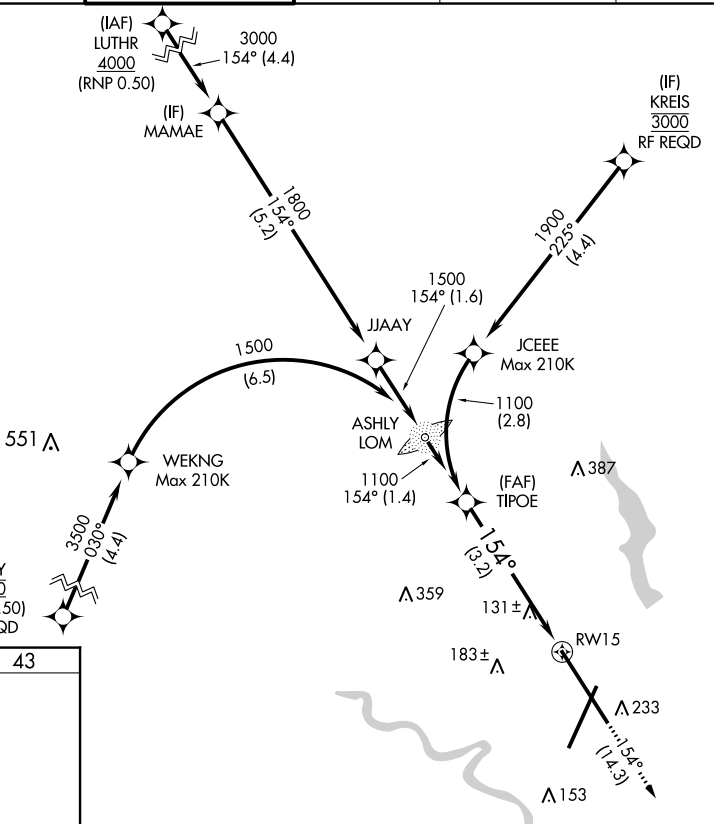

ELEV	46	TDZE	43
------	-----------	------	-----------

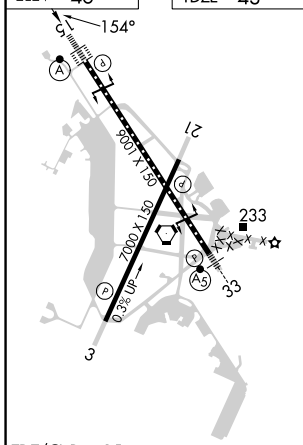

TDZ/CL Rwy 15
REIL Rwy 3 and 21
HIRL Rwy 3-21 and 15-33

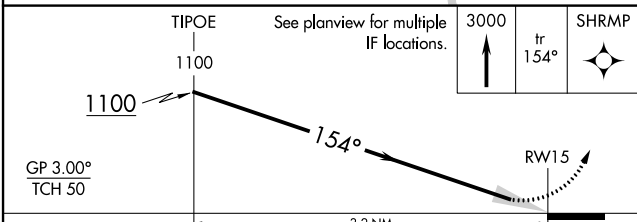

GP 3.00°				
TCH 50				
	3.2 NM			
CATEGORY	A	B	C	D
RNP 0.11 DA		315/24	272 (300-½)	
RNP 0.30 DA		428/45	385 (400-¾)	

AUTHORIZATION REQUIRED

SE-2, 03 OCT 2024 to 31 OCT 2024

SE-2, 03 OCT 2024 to 31 OCT 2024