
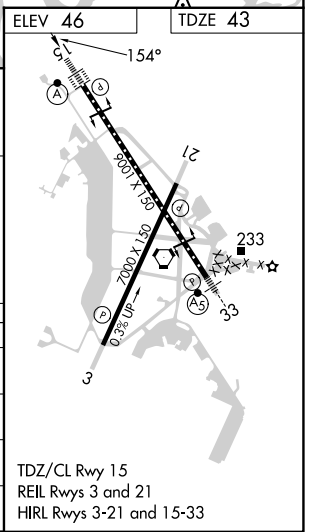
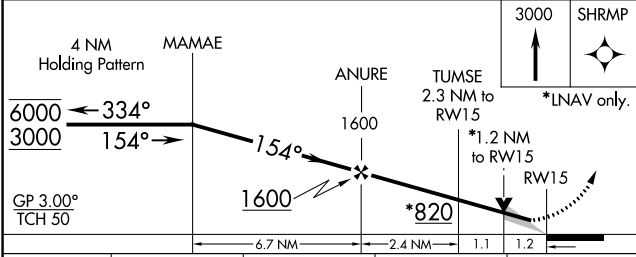


WAAS CH 93519 W15A	APP CRS 154°	Rwy Idg TDZE Apt Elev	9001 43 46
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 15

CHARLESTON AFB/INTL (CHS)

RNP APCH. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 6000. ALSF-2 ⚠ MISSED APPROACH: Climb to 3000 direct SHRMP and hold.		D-ATIS 124.75		CHARLESTON APP CON 120.7 306.925		CHARLESTON TOWER 126.0 239.0		GND CON 121.9 348.6		CLNC DEL 127.325 291.65		CPDLC
---	--	-------------------------	--	--	--	--	--	-------------------------------	--	-----------------------------------	--	-------

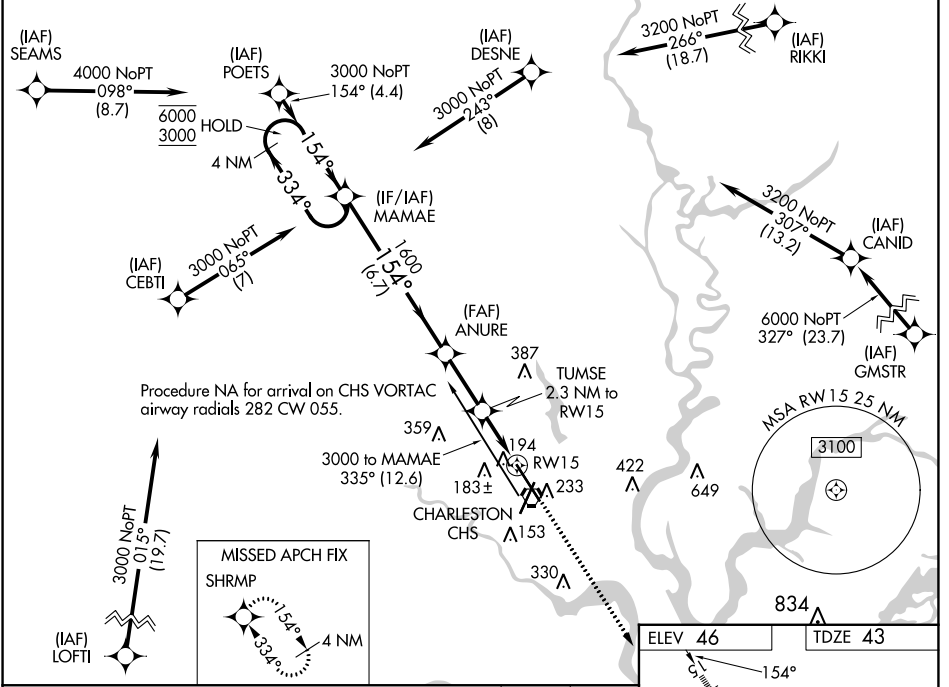

CATEGORY	A	B	C	D
LPV DA		243/18	200 (200-½)	
LNAV/VNAV DA		375/26	332 (400-½)	
LNAV MDA	460/24	417 (500-½)	460/40	417 (500-¾)
CIRCLING	540-1	494 (500-1)	540-1½ 494 (500-1½)	740-2¼ 694 (700-2¼)

SE-2, 03 OCT 2024 to 31 OCT 2024

SE-2, 03 OCT 2024 to 31 OCT 2024