RNAV (GPS) RWY 9

CHARLEVOIX MUNI (CVX)

WAAS	APP CRS	Rwy ldg	4549
CH 97708	090°	TDZE	669
W09A		Apt Elev	669

RNP APCH - GPS.

Circling NA to Rwys 4 and 22. Baro-VNAV NA when using Pellston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Pellston altimeter setting: increase LPV DA to 986 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1270 feet and all visibilities ¼ SM; increase all MDA 80 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 3000 direct COKOS and hold.

AWOS-3P	MINNEAPOLIS CENTER	UNICOM
120.0	134.6 354.05	122.8 (CTAF) L

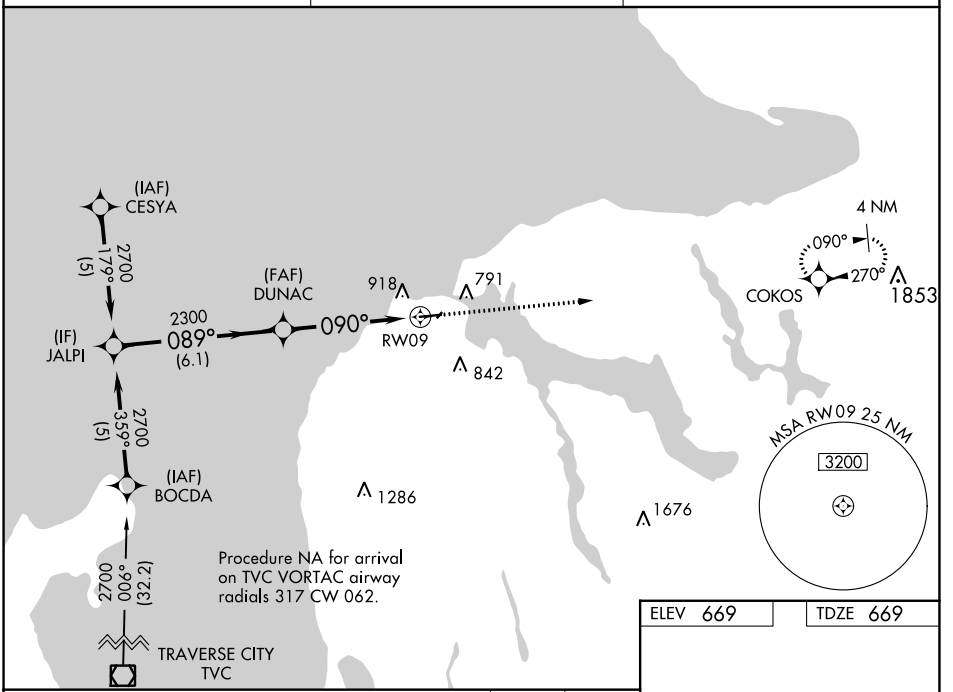

ELEV 669 TDZE 669

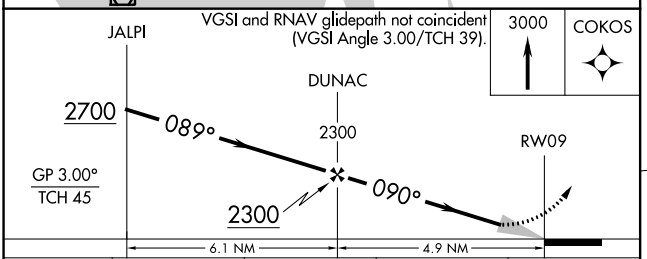



CATEGORY	A	B	C	D
LPV DA	919- ¾ 250 (300-¾)			
LNAV/VNAV DA	1203-1½ 534 (600-1½)			
LNAV MDA	1160-1 491 (500-1)		1160-1⅜ 491 (500-1⅜)	
CIRCLING	1280-1 611 (700-1)		1280-1¾ 611 (700-1¾)	1360-2¼ 691 (700-2¼)

REIL Rwys 9 and 27 L
MIRL Rwy 9-27 L

EC-1, 03 OCT 2024 to 31 OCT 2024
EC-1, 03 OCT 2024 to 31 OCT 2024