# RNAV (GPS) RWY 3

TOPEKA RGNL (FOE)

| WAAS | APP CRS | Rwy Idg | 7001 |
|---|---|---|---|
| CH 65934 | 035° | TDZE | 1078 |
| W03A | | Apt Elev | 1078 |

RNP APCH - GPS.

T A Baro-VNAV NA when using Philip Billard Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Philip Billard Muni altimeter setting and increase all DA 45 feet and all MDA 60 feet, increase LPV all Cats and LNAV/VNAV all Cats visibility ¼ mile, LNAV Cat C/D and Circling Cat D visibilities ¼ mile.

MISSED APPROACH: Climb to 3000 direct VAJEG and hold.

| ATIS | KANSAS CITY CENTER | FORBES TOWER★ | GND CON | UNICOM |
|---|---|---|---|---|
| 128.25 | 123.8 343.7 | 120.8 (CTAF) L 340.2 | 118.425 275.8 | 122.95 |

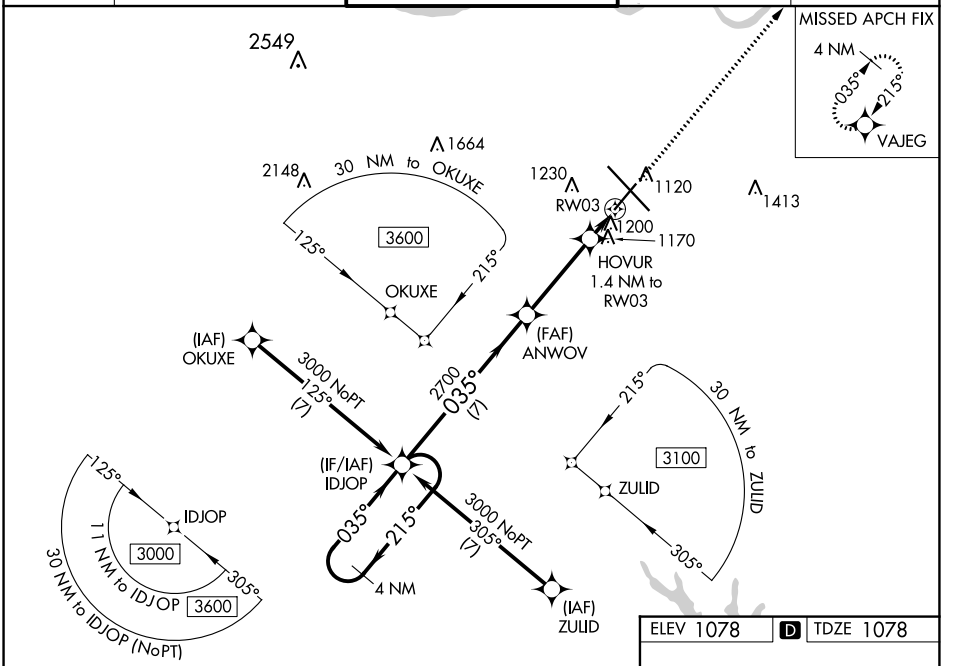


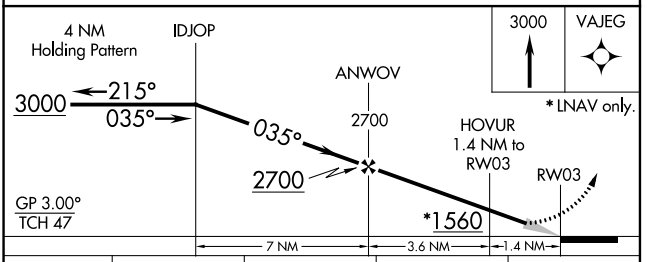


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1328-¾ 250 (300-¾) | | | |
| LNAV/VNAV DA | 1363-⅞ 285 (300-⅞) | | | |
| LNAV MDA | 1460-1 382 (400-1) | | 1460-1⅛ 382 (400-1⅛) | |
| C CIRCLING | 1520-1 442 (500-1) | 1580-1 502 (600-1) | 1580-1½ 502 (600-1½) | 1700-2 622 (700-2) |

ELEV 1078 D TDZE 1078




REIL Rwys 3, 13 and 21
MIRL Rwy 3-21 L
HIRL Rwy 13-31 L



NC-2, 31 OCT 2024 to 28 NOV 2024
NC-2, 31 OCT 2024 to 28 NOV 2024