ILS or LOC RWY 15

KISSIMMEE GATEWAY (ISM)

LOC/DME I-ISM	APP CRS	Rwy Idg	6001
109.75	153°	TDZE	82
Chan 34 (Y)		Apt Elev	82

VDP NA with Orlando Intl altimeter setting. When local altimeter setting not received, use Orlando Intl altimeter setting and increase all DA to 309 feet, and all MDA 40 feet; increase Circling Cat C visibility ¼ SM.

MALSF

MISSED APPROACH: Climb to 600 then climbing right turn to 2200 on heading 240° and ORL VORTAC R-200 to TEMPE INT/ORL 28 DME and hold.

ATIS	ORLANDO APP CON	KISSIMMEE TOWER ★	CLNC DEL	CLNC DEL	GND CON	UNICOM
128.775	119.4 351.9	124.45 (CTAF) L	121.7	123.95 (when twr closed)	121.7	122.95

RADAR REQUIRED

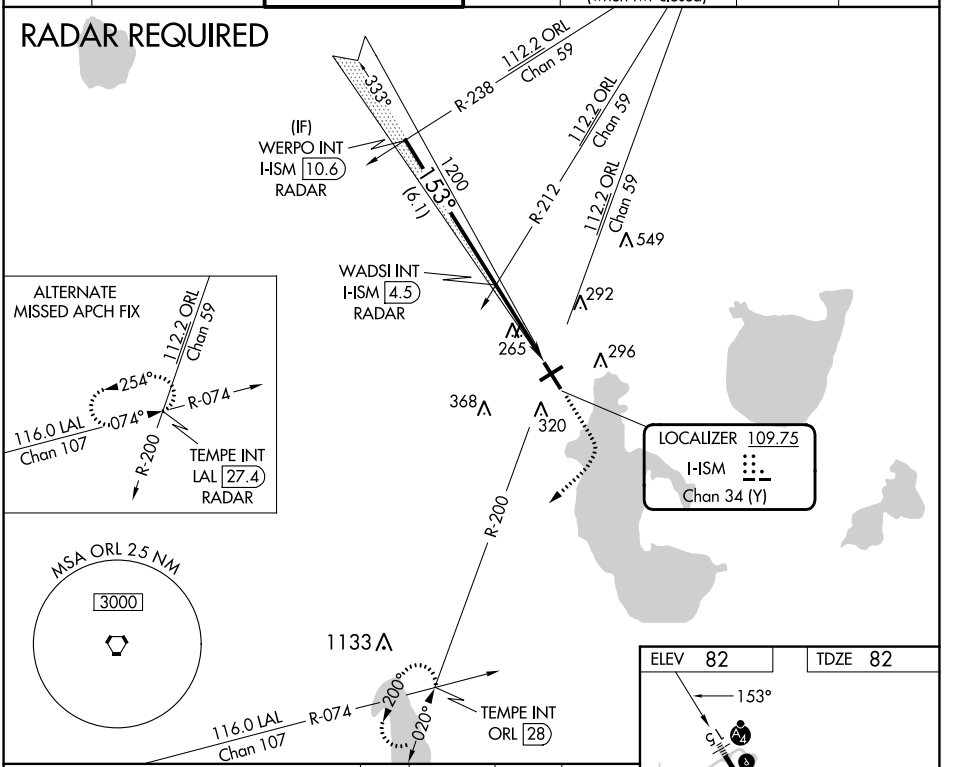

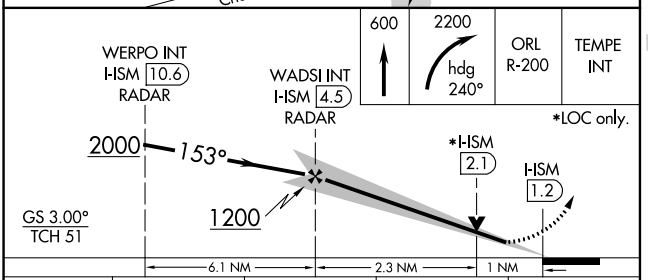

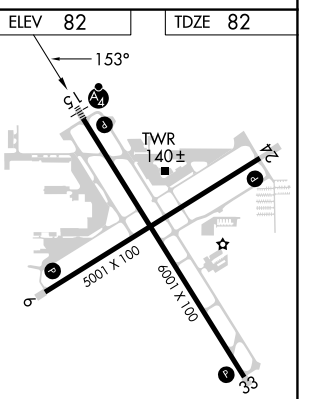

CATEGORY	A	B	C	D
S-ILS 15	282-¾ 200 (200-¾)			
S-LOC 15	440-¾ 358 (400-¾)			440-1¼ 358 (400-1¼)
CIRCLING	680-1 598 (600-1)		680-1½ 598 (600-1½)	700-2 618 (700-2)

REIL Rwys 6, 24 and 33 L
MIRL Rwys 15-33 and 6-24 L

FAF to MAP 3.3 NM

Knots	60	90	120	150	180
Min:Sec	3:18	2:12	1:39	1:19	1:06

SE-3, 31 OCT 2024 to 28 NOV 2024
SE-3, 31 OCT 2024 to 28 NOV 2024