

WAAS CH <b>50514</b> <b>W20A</b>	APP CRS <b>200°</b>	Rwy Idg TDZE <b>969</b> Apt Elev <b>969</b>
--	------------------------	---

# RNAV (GPS) RWY 20



CULLMAN RGNL/FOLSOM FLD (CMD)

RNP APCH - GPS.


**⚠** Circling Rwy 2 NA at night. Baro-VNAV and VDP NA when using Huntsville Intl-Carl T Jones Fld altimeter setting. Rwy 20 helicopter visibility reduction below  $\frac{3}{4}$  SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below  $-16^{\circ}\text{C}$  or above  $54^{\circ}\text{C}$ . When local altimeter setting not received, use Huntsville Intl-Carl T Jones Fld altimeter setting and increase LPV DA to 1320 feet, LNAV/VNAV DA to 1479 feet, and increase all MDA 120 feet; increase LPV all Cats visibility  $\frac{1}{4}$  SM, LNAV/VNAV all Cats visibility  $\frac{1}{4}$  SM, LNAV Cat C, D visibility  $\frac{3}{8}$  SM and Circling Cat C  $\frac{1}{2}$  SM, Cat D  $\frac{1}{4}$  SM.

**MISSED APPROACH:**  
Climb to 3200 direct MELYE and hold.

AWOS-3PT <b>124.175</b>	HUNTSVILLE APP CON* <b>118.05 239.0</b>	UNICOM <b>122.8 (CTAF) 0</b>
----------------------------	--	---------------------------------

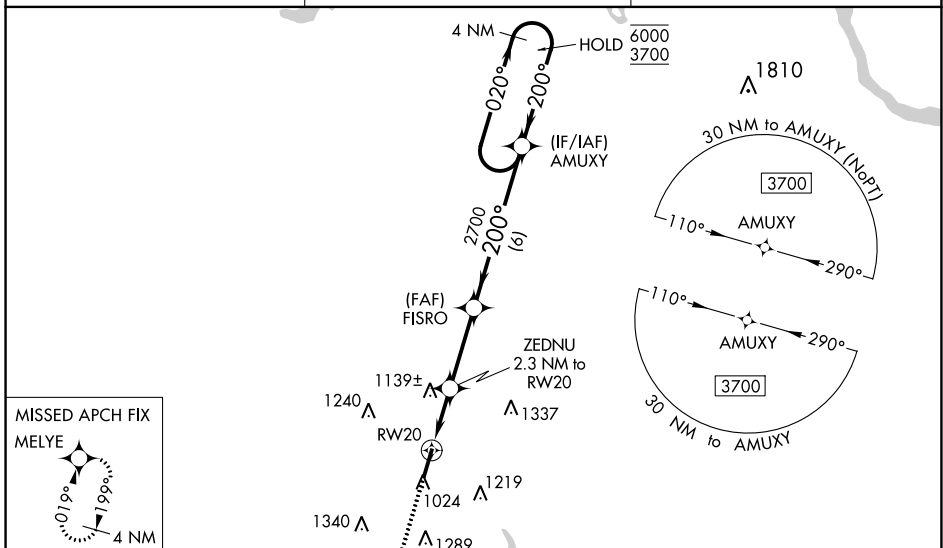

ELEV <b>969</b>	TDZE <b>969</b>
-----------------	-----------------

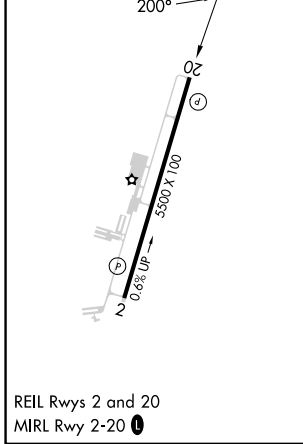

3200	MELYE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 33).	4 NM Holding Pattern
*LNAV only.	ZEDNU 2.3 NM to RW20	FISRO 2700	AMUXY
*1.2 NM to RW20	1740*	2700	6000 3700
GP 3.00° TCH 40			

CATEGORY	A	B	C	D
LPV DA		1219- $\frac{3}{4}$	250 (300- $\frac{3}{4}$ )	
LNAV/VNAV DA		1378-1 $\frac{1}{8}$	409 (500-1 $\frac{1}{8}$ )	
LNAV MDA	1400-1	431 (500-1)	1400-1 $\frac{1}{4}$	431 (500-1 $\frac{1}{4}$ )
<b>C</b> CIRCLING	1420-1 451 (500-1)	1500-1 531 (600-1)	1600-1 $\frac{3}{4}$ 631 (700-1 $\frac{3}{4}$ )	1640-2 $\frac{1}{4}$ 671 (700-2 $\frac{1}{4}$ )

SE-4, 31 OCT 2024 to 28 NOV 2024

SE-4, 31 OCT 2024 to 28 NOV 2024